

6P200Fe

LOW FREQUENCY TRANSDUCER
P200 Series

KEY FEATURES

- 200 W_{AES} power handling
- High sensitivity
- Low Resonant Frequency: 58 Hz
- Low harmonic distortion
- Extended controlled displacement: $X_{max} \pm 5.5 \text{ mm}$
- Extended mechanical displacement capability: X_{DD} 20 mm
- CONEX spider and waterproof materials
- Designed with MMSS technology
- Forced air convection circuit for low power compression
- Ferrite magnet system
- Optimal for small / compact designs



Nominal diameter	165 mm	6,5 in
Rated impedance		8 Ω
Minimum impedance		5,9 Ω
Power capacity*	2	00 W _{AES}
Program power		400 W
Sensitivity	93 dB @ 1	W @ Z _N
Frequency range	55 - 9	9.000 Hz
Recom. enclosure vol.	6 / 20 I 0,21	/ 0,71 ft ³
Voice coil diameter	51,7 mm	2 in
BI factor		10,5 N/A
Moving mass		0,017 kg
Voice coil length		14 mm
Air gap height		9 mm
X _{damage} (peak to peak)		20 mm


MOUNTING INFORMATION

Overall diameter	187,5 mm	7,38 in
Bolt circle diameter	172 mm	6,77 in
Baffle cutout diameter:		
- Front mount	145,3 mm	5,70 in
Depth	86,5 mm	3,4 in
Volume displaced by driver	0,61	0,02 ft ³
Net weight	3,1 kg	6,83 lb
Shipping weight	3,5 kg	7,77 lb

Notes:



DIMENSION DRAWINGS

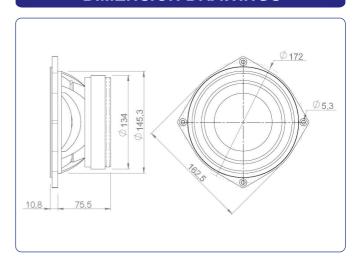

THIELE-SMALL PARAMETERS**

Resonant frequency, f _s	58 Hz
D.C. Voice coil resistance, R _e	4,9 Ω
Mechanical Quality Factor, Q _{ms}	4,6
Electrical Quality Factor, Qes	0,27
Total Quality Factor, Qts	0,26
Equivalent Air Volume to C _{ms} , V _{as}	11,1
Mechanical Compliance, C _{ms}	429 μm / N
Mechanical Resistance, R _{ms}	1,40 kg / s
Efficiency, η ₀	0,75 %
Effective Surface Area, S _d	0,0135 m ²
Maximum Displacement, X _{max} ***	5,5 mm
Displacement Volume, V _d	74,25 cm ³
Voice Coil Inductance, Le	0,3 mH

^{*} The power capaticty is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

^{**} T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).


^{***} The X_{max} is calculated as $(L_{VC}$ - $H_{ag})/2$ + $(H_{ag}/3,5)$, where L_{VC} is the voice coil length and H_{ag} is the air gap height.




6P200Fe

LOW REQUENCY TRANSDUCER
P200 Series

FREE AIR IMPEDANCE CURVE

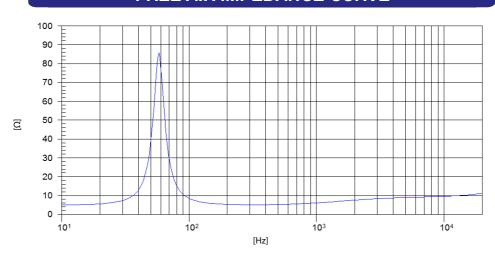

FREQUENCY RESPONSE AND DISTORTION

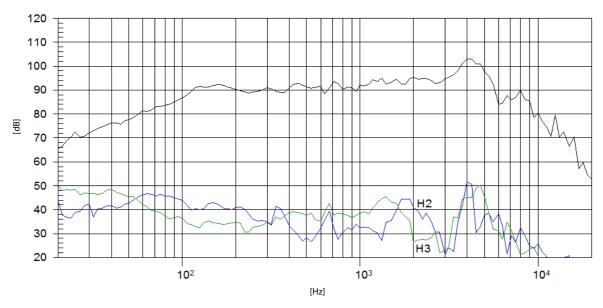

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

beyma //

Polígono Industrial Moncada II • C/. Pont Sec, 1c • 46113 MONCADA - Valencia (Spain)
• Tel.: (34) 96 130 13 75 • Fax: (34) 96 130 15 07 • http://www.beyma.com • E-mail: beyma@beyma.com •