

SYSTEM

ESK 163L.5 375W



Technical Specifications

Component	-	Three way system
Woofer size	mm (in.)	165 (6.5)
Midwoofer size	mm (in.)	100 (4)
Tweeter diaphragm	mm (in.)	26 (1)
Power handling	W peak W continuous	375 125
Impedance	Ω	4
Frequency response	Hz	50 ÷ 23k
Sensitivity	dB SPL	92
Woofer magnet size D-d-h	mm (in.)	85 x 32 x 17 (3.55 x 1.26 x 0.7)
Midwoofer magnet size D-d-h	mm (in.)	70 x 32 x 10 (2.7 x 1.26 x 0.4)
Tweeter magnet size D-d-h	mm (in.)	19 x 3 (0.75 x 0.12)
Woofer voice coil Ø	mm (in.)	25 (1)
Midwoofer voice coil Ø	mm (in.)	25 (1)
Tweeter voice coil Ø	mm (in.)	20 (0.8)
Woofer magnet	-	High density flux ferrite
Midwoofer magnet	-	High density flux ferrite
Tweeter magnet	-	Neodymium
Woofer cone	-	Water repellent non pressed paper
Midwoofer cone	-	Water repellent pressed paper
Tweeter dome	-	Tetolon
Crossover type	LP/BP/HP @ 600 Hz - 12/6 dB Oct. 6 kHz - 6/12 dB Oct.	
Component adjustment	dB	+2; 0; -2
Woofer weight of one component	kg (lb.)	0,98 (2.16)
Midwoofer weight of one component	kg (lb.)	0,45 (0.99)
Tweeter weight of one component	kg (lb.)	0,03 (0.07)
Crossover weight of one component	kg (lb.)	0,42 (0.93)

Electro-Acoustic Parameters

		Tweeter	Midwoofer	Woofer
D	mm	20	88	134
Xmax	mm	-	1,5	3
Re	Ω	3,7	3	3,3
Fs	Hz	1350	104	65
Le	mH	0,02	0,15	0,21
Vas	l	-	2,3	11
Mms	g	0,19	5,3	14,8
Cms	mm/N	0,07	0,44	0,38
BL	T-m	1,5	3,5	4,8
Qts	-	0,9	0,68	0,72
Qes	-	2,7	0,87	0,88
Qms	-	1,5	3,1	3,8
Spl	dB	92	91	92

ET 26.5

1. Tetolon dome, with hemispheric profile and wide roll surround; extremely light weight and properly damped for smooth and extended high frequency response.
2. Acoustic compression chamber; high efficiency and off-axis optimized response.
3. CCAW (Copper Clad Aluminium Wire) ultra light ferrofluid-cooled mobile voice coil.
4. High energy neodymium magnet.
5. Low carbon content plates for maximum magnetic permeability and high heat dissipation.
6. Damping material; controlling acoustic resonances insuring clear, high frequency tones.

EMV 100.5

1. V-cone® for best off-axis response and clear mid-high frequency detail.
2. Water-repellent treated paper cone; butyl rubber surround.
3. Pure copper voice coil, wound on aluminium former, for exceptional thermal and mechanical capacity.
4. Large motor assembly for excellent control of voice coil.
5. Low carbon content plates for maximum magnetic permeability and high heat dissipation.
6. Rubber magnet cover provides damping to the basket and motor structure and protects from abrasions and damages.
7. DIN size basket coated with scratch-proof, corrosive-resistant material.
8. Tin-plated, high current terminals.
9. Silver-plated lead wires, for maximum reliability and conductivity.
10. Epoxy glue for basket and motor system provides perfect coupling.
11. Curve memory Nomex spider for consistent, reliable performance.

EV 165L.5



1. V-cone® for best off-axis response and clear mid-high frequency detail.
2. Water-repellent non-pressed paper cone provides deep, tight and dynamic bass output.
3. Pure copper voice coil, wound on aluminium former, for very good thermal and mechanical capacity.
4. Large motor assembly for excellent mobile voice coil control.
5. Low carbon content plates for maximum magnetic permeability and high heat dissipation.
6. Rubber magnet cover provides damping to the basket and motor structure and protects from abrasions and damages.
7. DIN size basket coated with scratch-proof, corrosive-resistant material.
8. Tin-plated, high current terminals.
9. Silver-plated lead wires, for maximum reliability and conductivity.
10. Epoxy glue for basket and motor system provides perfect coupling.
11. Curve memory Nomex spider for consistent, reliable performance.

* Tweeter mounting accessories and woofer grille included.

SYSTEM energy



ESK 163L.5 375W

A	165 mm	6.5 in.
B	142 mm	5.6 in.
C	72 mm	2.83 in.
D	65 mm	2.56 in.

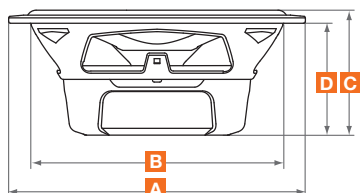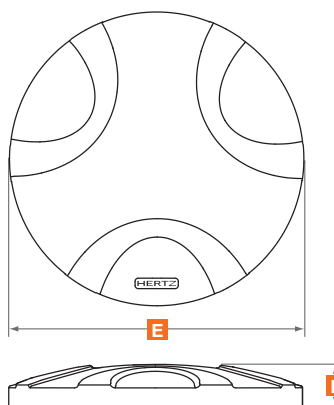



E	184 mm	7.25 in.
F	25 mm	0.98 in.

A	103 mm	4 in.
A3	130 mm	5.12 in.
B	93 mm	3.66 in.
C	49 mm	1.93 in.
D	44 mm	1.73 in.






E	141 mm	5.55 in.
F	22 mm	0.86 in.

G	138,5 mm	5.45 in.
H	109,8 mm	4.32 in.
I	41 mm	1.61 in.



A	44 mm	1.7 in.
B	38,5 mm	1.5 in.
C	20 mm	0.78 in.
D	8,5 mm	0.33 in.



K	28,3 mm	1.11 in.
J	44,3 mm	1.75 in.
R	48 mm	1.89 in.
S	10 mm	0.4 in.
T	10 mm	0.4 in.