

APPLICATIONS

**Toyota Corolla
2003-2007**



KIT FEATURES

- Double DIN Radio Provision
- Stacked ISO Units Provision



KIT COMPONENTS

A) Double DIN Trim Plate B) Double DIN Brackets

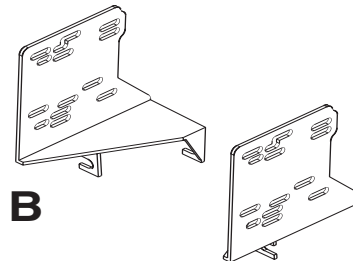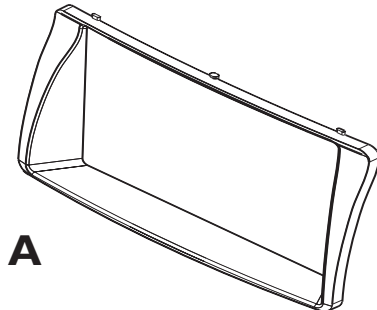

TOOLS REQUIRED:

- Small Flat Blade Screwdriver
- Panel Removal Tool
- Phillips Screwdriver
- Socket Set




TABLE OF CONTENTS

Dash Disassembly

- Totota Corolla 2003-2007 1

Kit Assembly

- Double DIN Radio Provision 2

- Stacked ISO Units Provision..... 3

Final Assembly 4

***Note:**


Refer also to the instructions included with the aftermarket radio.

TOYOTA COROLLA 2003-2007


- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Unclip and remove the gear shifter trim panel. (Figure A)
- 3** Remove the center a/c knob and (1) Phillips screw exposed behind it. (Figure B)
- 4** Unclip and remove the a/c-pocket assembly. (Figure C)
- 5** Remove (4) 10 MM bolts from the bottom of the radio then unclip and remove the factory radio and trim panel together. Unplug radio from factory harness. (Figure D)
- 6** Unclip and remove the radio trim panel including the a/c vents from the factory radio.

Continue to kit assembly.


A

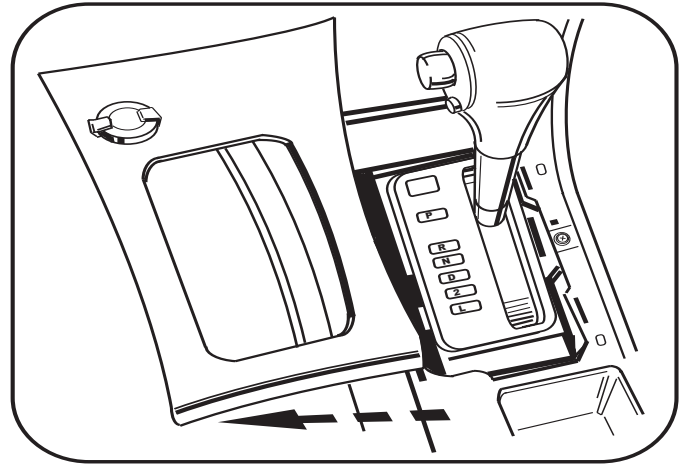


B

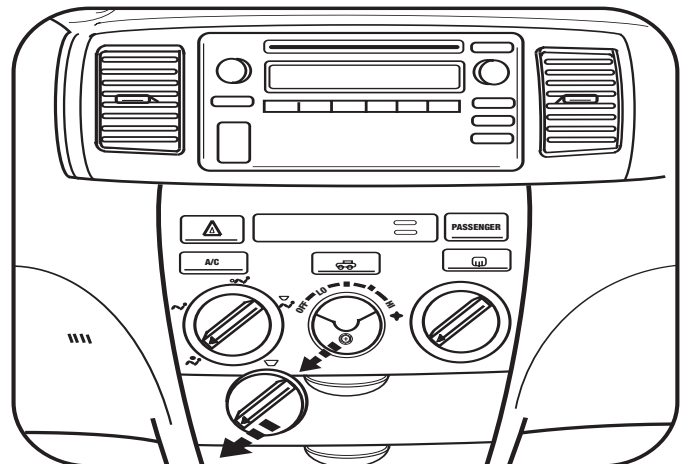

D

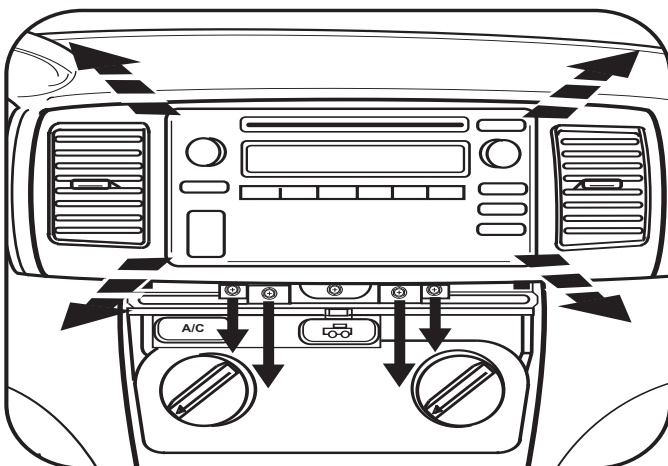

C


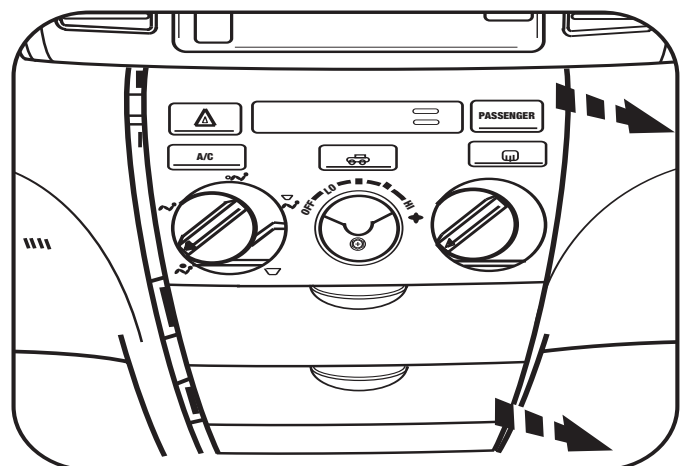


DOUBLE DIN RADIO PROVISION

**Note: Refer also to the instructions included with the aftermarket radio.*

- 1 Snap the Double DIN trim plate into the factory trim panel. (Figure A)
- 2 Slide the Double DIN radio into the Double DIN brackets and secure the radio to the brackets using the screws supplied with the radio. (Figure B)

Continue to final assembly.

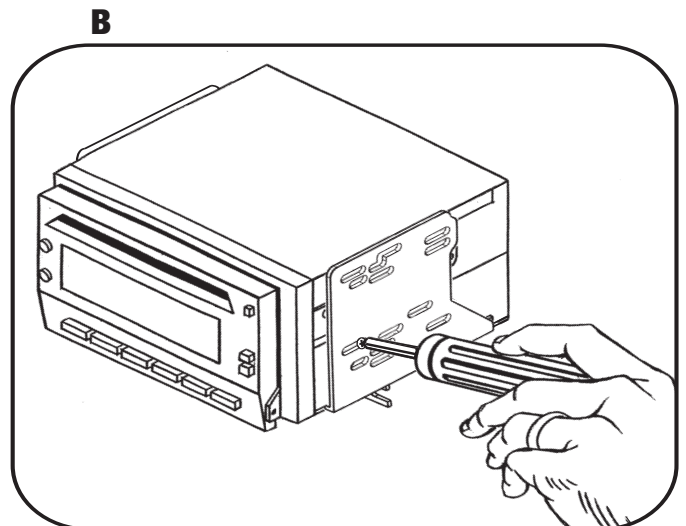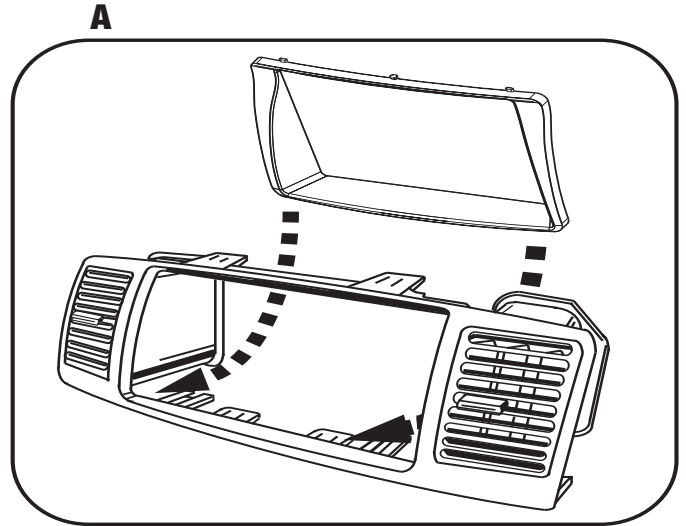

STACKED ISO UNITS PROVISION

**Note: Refer also to the instructions included with the aftermarket radio.*

- 1 Snap the Double DIN trim plate into the factory trim panel. (Figure A)
- 2 Slide the stacked ISO units into the Double DIN brackets and secure the units to the brackets using the screws supplied with the units. (Figure B)

Continue to final assembly.

