



TECHNICAL SPECIFICATIONS

	GZUK 65SQX
Cone (Dome)	WFWC (1Layer glass fibre / 1layer wood fibre)
Cone color	Brown
Surround	LDW rubber
Dustcap	Coated cloth fibre with silver logo print
Basket / Frame material	Euro-Din Aluminum cast
Basket / Frame color	Dark grey powder coated
Terminal	Chrome push terminal
Magnet	1 x Ferrit 90 x 15 mm (3.54" x 0.59")
Voice coil	31 mm / 1.22" copper round wire
Voice coil former	Aluminum
RE	3.44 Ohm
SPL	89 dB
FS	55.1 Hz
QMS	7.514
QES	0.522
QTS	0.488
VAS	12.6 L / 0.445 cu.ft
MMS	18.1 Gr
BL	6.4 N/A
RMS	0.834 kg/s
CMS	0.46 mm/N
LE	0.458 mH
Linear excursion	+/- 5 mm / 0.197"
X max	10 mm / 0.39"
Frequency response	40 Hz – 4 kHz
Powerhandling	120 / 200 W
Outer diameter	165 mm / 6.5"
Mounting diameter	142 mm / 5.59"
Mounting depth	70 mm / 2.76"




TECHNICAL SPECIFICATIONS

WFWC® "Wooden Fiber Woven Compound"

This state of the art cone material and its production technology combine extraordinary low distortion of thin woven glass fiber and the outstanding strength of rough wooden fabric.
Due to its light weight this cone offers perfect and precise sound quality.

LDW® "Low Distortion Wave"

Because of its complex shaped wave-form, the exclusively designed LDW® Surround ensures an extremely linear performance and the reduction of partial oscillation.

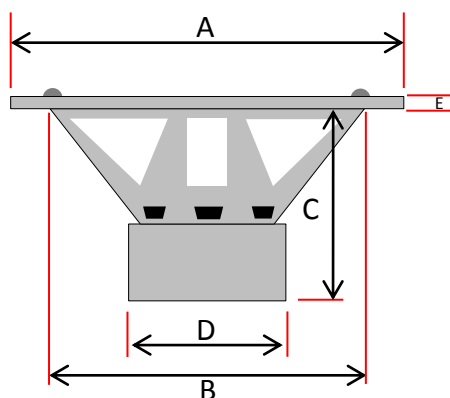

A	165 mm / 6.5"
B	142 mm / 5.59"
C	70 mm / 2.76"
D	104 mm / 4.09" (90 mm / 3.54")
E	4.3 mm / 0.169"

