




TECHNICAL SPECIFICATIONS

	GZCM 8.0N-PRO
Cone (Dome)	Fibre reinforced paper cone
Cone color	Black matt
Surround	Coated cotton W-Surround
Dustcap	Black aluminum phaseplug
Basket / Frame material	Aluminum cast
Basket / Frame color	Red
Terminal	Push terminal
Magnet	1 x Neodymium Ø 105 mm / 4.1"
Voice coil	63 mm / 2.5" High temperature copper-clad aluminum round wire voice coil
Voice coil former	Kapton
RE	3.7 Ohm
SPL	98 dB
FS	102.2 Hz
QMS	12.18
QES	0.29
QTS	0.28
VAS	9.1 L / 0.32 cu.ft
MMS	16.3 Gr
BL	11.5 N/A
RMS	0.9 kg/s
CMS	0.15 mm/N
LE	0.25 mH
Linear excursion	+/- 2 mm / 0.079"
X max	4 mm / 0.16"
Frequency response	130 Hz – 10 kHz
Powerhandling	300 / 500 W
Outer diameter	209 mm / 8.23"
Mounting diameter	184 mm / 7.24"
Mounting depth	83 mm / 3.27"



TECHNICAL SPECIFICATIONS

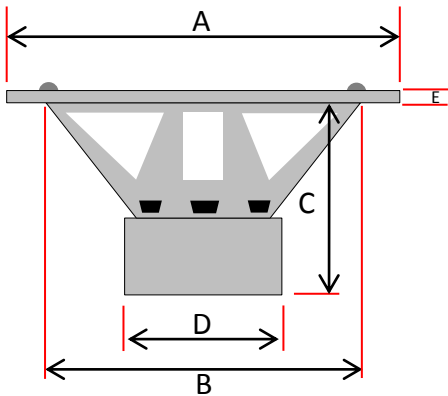

A	209 mm / 8.23"
B	184 mm / 7.24"
C	83 mm / 3.27"
D	105 mm / 4.1"
E	7 mm / 0.28"

