


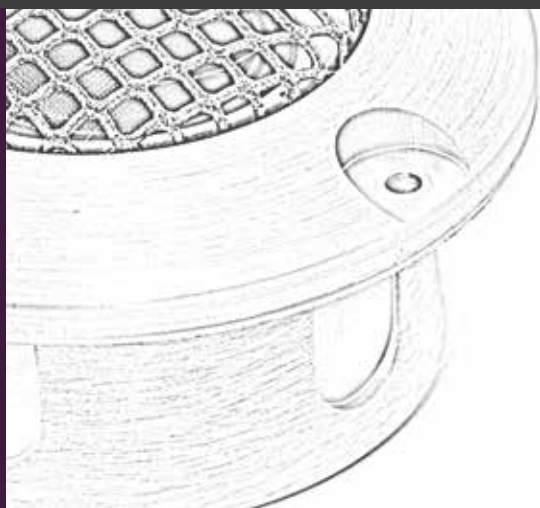

Normal Impedance: 4Ω
Power RMS (filtered 12dB 6000hz): 100W
Power RMS (filtered 12dB 3500hz): 60W
Voice Coil $\varnothing$: 26mm
Sensitivity: 90dB
Frequency Response: 2.500Hz - 18.000Hz
Fs: 1500Hz


Frame: CFT Aluminium
Dome: Polyester
Magnet: Neodymium
Surround: Polyester
Voice Coil winding: Copper
Voice Coil support: Aluminium

SPECIFICATIONS

Fs: 1499.8270	VAS: 0.0000
Fs Added Mass: 0.0000	dB SPL: 0.0000
Fs Known Vol: 0.0000	L 1kHz: 0.0409
Added Mass: 0.0000	L 10kHz: 0.0219
Known Vol: 0.0000	CAS: 0.000000E+0000
Diameter: 0.0000	RAS: 0.0000
ZMax: 5.0627	MAS: 0.0000
ZMax Added Mass: 0.0000	RAT: 0.0000
ZMax Known Vol: 0.0000	SD: 0.0000
Z F1F2: 4.2094	LCES: 0.0996
Re: 3.5000	CMES: 113.0987
Rms: 0.0000	RES: 1.5627
Qms: 1.6655	MMD: 0.0000
Qes: 3.7303	RMT: 0.0000
Qts: 1.1514	ETA: 0.0000
Cms: 0.0000	Z Min: 3.8600
Mms: 0.0000	Z AVG: 4.1053
BL: 0.0000	



FREQUENCY RESPONSE

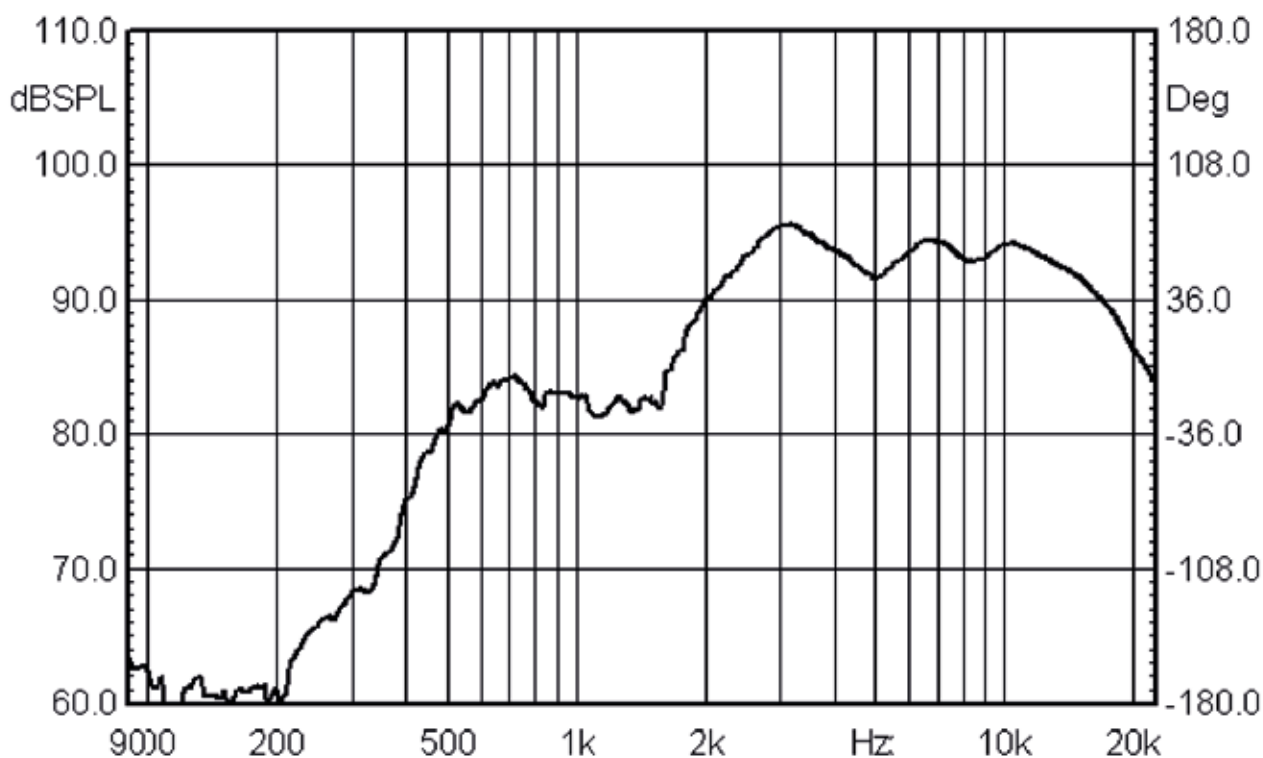

IMPEDANCE

