





TLS 15 - 390 mm subwoofer

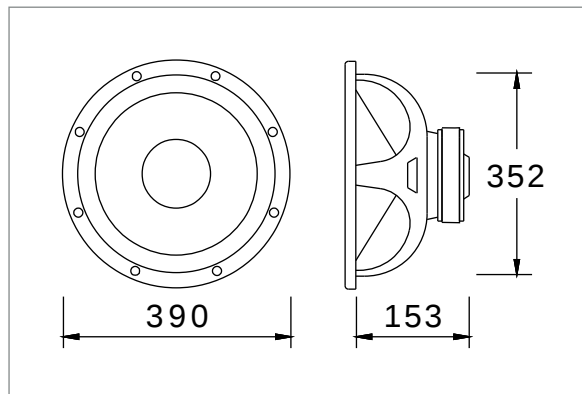

TECHNICAL DATA

max power (Pm)	600 watt	mechanical Q factor (Qms)	3.04
nominal power (Pn)	300 watt	electrical Q factor (Qes)	0.81
frequency range (BW)	35 ÷ 2000 Hz	total Q factor (Qts)	0.64
sensitivity (2.83 V/m)	92 dB	moving mass (Mms)	158.3 g
nominal impedance (Zn)	4 ohm	compliance (Cms)	0.29 mm/N
resonance frequency (Fs)	23 Hz	equivalent volume (Vas)	303 litres
voice coil diameter	65 mm	force factor (BxL)	9.9 N/A
cone material	polypropylene	voice coil resistance (Re)	3.4 ohm
surround material	butyl rubber	voice coil inductance (Le)	0.4 mH
basket material	stamped steel	emission diameter (D)	330 mm
magnet material	ferrite	linear excursion (Xmax)	± 6 mm

SUGGESTED BOX

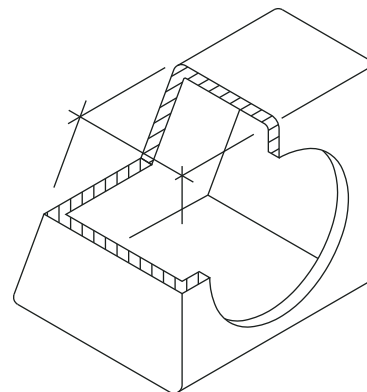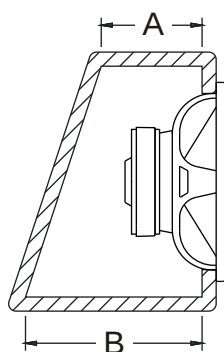

	A	B	C	D	Ø	Volume
	mm	mm	mm	mm	mm	litres
closed box	200	350	420	540	354	62