




TXS 10 - 258 mm subwoofer

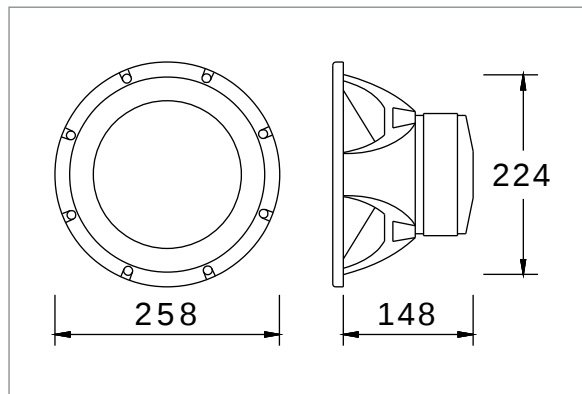


TECHNICAL DATA

max power (Pm)	500 watt	mechanical Q factor (Qms)	2.98
nominal power (Pn)	250 watt	electrical Q factor (Qes)	0.58
frequency range (BW)	35 ÷ 2000 Hz	total Q factor (Qts)	0.43
sensitivity (2.83 V/m)	90 dB	moving mass (Mms)	79.7 g
nominal impedance (Zn)	4 ohm	compliance (Cms)	0.22 mm/N
resonance frequency (Fs)	38 Hz	equivalent volume (Vas)	32 litres
voice coil diameter	65 mm	force factor (BxL)	10.4 N/A
cone material	polypropylene	voice coil resistance (Re)	3.3 ohm
surround material	butyl rubber	voice coil inductance (Le)	0.4 mH
basket material	aluminium die cast	emission diameter (D)	202 mm
magnet material	ferrite	linear excursion (Xmax)	± 8 mm


SUGGESTED BOX

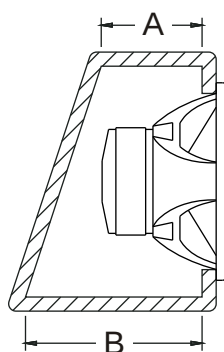

closed



reflex



	A	B	C	D	Ø	reflex tube	Volume
	mm	mm	mm	mm	mm	mm	litres
closed box	120	230	300	320	226	-	17
reflex box	175	300	340	400	226	Ø 94 / L 180	32