







PRF 260 - suggested boxes (page 1 of 2)




CLOSED BOX (small)

range: 50 ÷ 120 Hz
sensitivity: 88 dB @ 70 Hz
volume: 13 litres






 materiale fonoassorbente / sound-absorbing material







CLOSED BOX (large)

range: 45 ÷ 120 Hz
sensitivity: 87 dB @ 60 Hz
volume: 18 litres







 materiale fonoassorbente / sound-absorbing material

PRF 260 - suggested boxes (page 2 of 2)







REFLEX BOX (small)
range: 38 ÷ 120 Hz
sensitivity: 92 dB @ 50 Hz
tube: Ø 74 x 200 mm
volume: 23 litres

 **materiale fonoassorbente / sound-absorbing material**

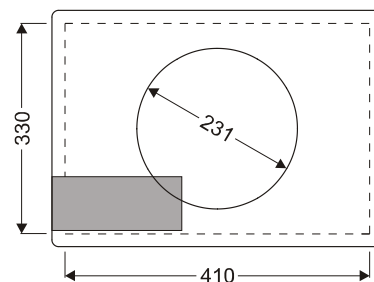

REFLEX BOX (large)
range: 32 ÷ 120 Hz
sensitivity: 90 dB @ 40 Hz
tube: Ø 74 x 220 mm
volume: 33 litres

 **materiale fonoassorbente / sound-absorbing material**

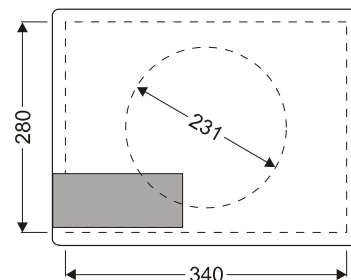

BAND-PASS BOX
range: 40 ÷ 100 Hz
sensitivity: 92 dB @ 60 Hz
tube: Ø 94 x 240 mm
Vc/Vb volume: 15/12 litres

 **materiale fonoassorbente / sound-absorbing material**