

SUB BOX

di ECI


DBX 250 300 Watt



Technical Specifications

| | | |
|-------------------------|--------------------------------|-----------|
| Component: | Sub Box | |
| Size | mm | 250 (10") |
| Power Handling (Watt) | peak | 300 |
| | continuous program | 150 |
| Impedance | Ohm | 4 |
| Frequency response | Hz | 32 - 400 |
| Sensitivity | dB/SPL | 90 |
| Weight of one component | Kg | n.d. |
| Magnet | High density flux ferrite | |
| Cone | Water repellent, pressed paper | |

- 1 Very high efficiency subwoofer unit, superior power handling.
- 2 Plywood cabinet construction, for tight bass control.
- 3 Xponential Flanged Duct for maximum linearity.
- 4 High current tin plated terminals.
- 5 Angled rear wall, for easy installation and resonances damping.

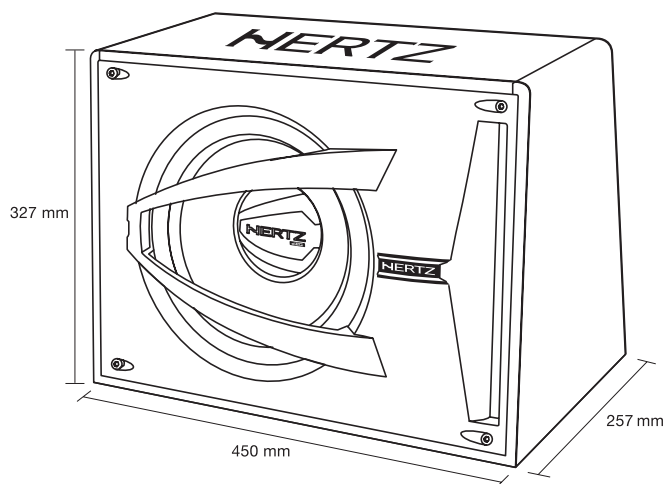

dieci

The Dieci Line represents a new performance landmark in its category. Hertz aimed at obtaining high efficiency, maximum tonal quality and high grade tonal accuracy.

The speaker cones and voice coil formers are made of a special natural paper mixture. Foam surrounds and cotton spiders ensure mechanical reliability and optimal control even under high excursion conditions. The large motor allows tight control of the loudspeaker moving assembly for tight, dynamic output.

The Dieci line is the perfect speaker choice for factory OEM upgrades, direct head power or with high quality amplifiers.

Start the right way: with the first step into the Hertz world.

Thanks to the inverted phase plug and to the very light Mylar membrane, the **DT 16 TWEETER** manages to have the same technical and acoustical benefits of a conventional dome membrane component.

Compact **SIZE**



DIECI WOOFER cone is totally new: the pressed paper V-cone ensures maximum linearity and wide sound dispersion.

DIECI WOOFERS were designed for easy installations in OEM factory speaker locations and are optimized for unique acoustics found in the automotive environment.



The low-loss crossovers, provided with the coaxial and component systems, do not alter the original musical signal, always providing clear, powerful, undistorted sound.

DIECI COAX are provided with Neodimium magnet tweeter featuring built-in crossover for bursting dynamics and DIN size gasket for an easy installation in whatever factory locations.



DIECI SUBWOOFERS provide very high efficiency, as well as superior power handling. The pure copper voice coils are wound on aluminium formers, providing good thermal and mechanical capacity. The vented hole on the bottom plate allows better thermal dissipation and linear excursion.



The **DBX 250** enclosure is made of multi-layer laminated Plywood. The Xponential Flanged Duct ensures maximum linearity of the airflow, providing tight, dynamic bass. The angled rear wall allows easy installation and ensures diffusion of the rear wave for resonance-free performance.

