


12.301170-03

Pioneer sound.vision.soul

Pioneer
sound.vision.soul

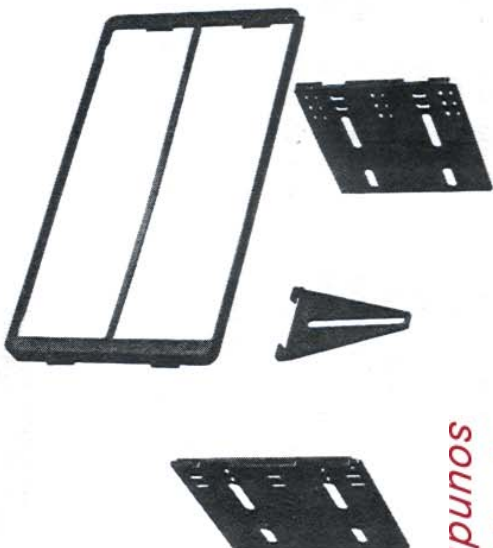

VEHICLE APPLICATIONS (Double ISO/Double DIN Installation Kit)

FORD

1997-2005 Club Wagon
1997-2005 Econoline Van
2001-2005 Escape
2000-2005 Excursion
1995-2001 Explorer (all models)
1999-2003 F-Series trucks
2004 F-150 (Heritage model only)
1995-2005 Ranger
1999-2003 Windstar

LINCOLN

*1995-1997 Continental
*1996-1998 Mark VIII
*1998-2001 Town Car

MAZDA

1995-2005 B-series Pick-ups

MERCURY

2001-2002 Cougar
2006 Mariner
1997-2001 Mountaineer

* See special note section on next page


RADIO INSTALLATION INSTRUCTIONS

NOTE: The installation for this kit requires dash modification.

1. Carefully remove the top and bottom lip sections from the inside of the dash bezel's radio opening.
2. Attach rear support bracket to the rear of the ISO mount radios. (Support bracket may be located on top or bottom depending on vehicle)
3. **CAUTION:** See Special Notes section on page 2
4. Insert radio assembly into dash opening and lock into place.

SPECIAL NOTES


CAUTION: This installation kit is designed to go into the vehicles listed. Once the kit is installed into the dash opening, if you need to remove the aftermarket radio, you will have to remove the dash trim bezel to do so. The vehicles listed in the vehicle application section of this instruction sheet that have an (*) asterisk next to them require that the vehicles entire dash be removed to be able to get the installation kit and after market radio components out without damaging the vehicles dash integrity.

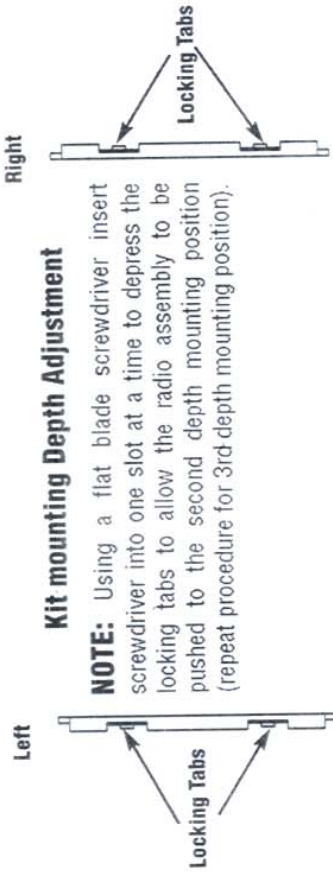


5. Attach installation kit trim ring only after desired mounting depth has been achieved.

KIT ASSEMBLY INSTRUCTIONS

1. Using screws provided with radio components attach left and right side brackets to the (2) ISO mount components (do not tighten at this time).
2. Attach ISO trim ring to ISO mount brackets.
3. Adjust radio components forward or backward for desired look and tighten mounting screws when desired look is attained.
4. Remove trim ring from ISO mount assembly.

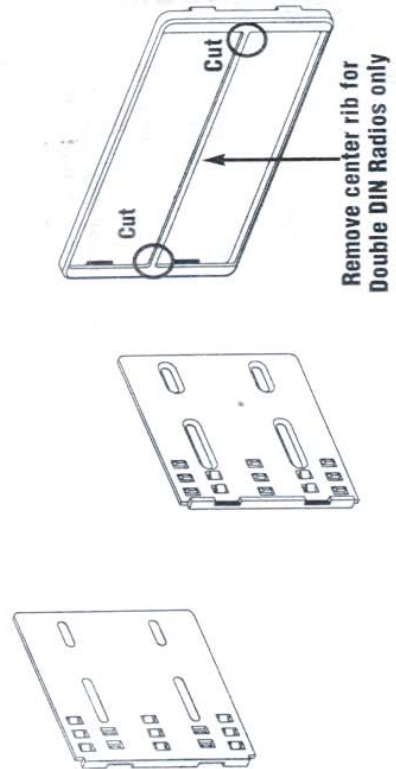

Double ISO Trim

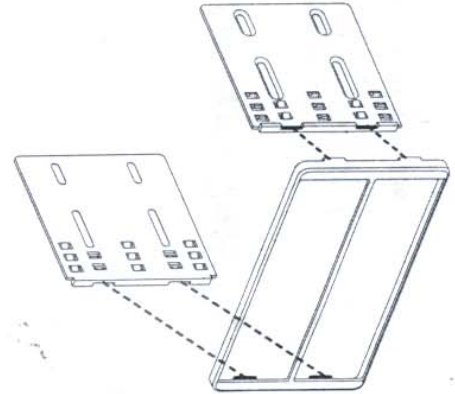

Double DIN Trim

