


12.301214-02

Pioneer sound.vision.soul

Nissan 350Z

Pioneer
sound.vision.soul

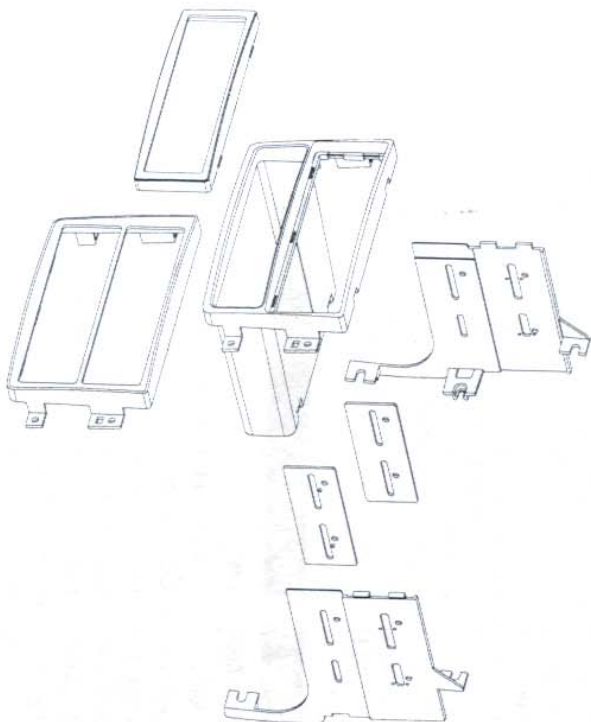

VEHICLE APPLICATIONS

NISSAN


2006 350 Z

KIT ASSEMBLY INSTRUCTIONS

Double DIN & Double ISO Mount Applications

1. Remove the shaded tab on both Left and Right Brackets as illustrated below.
2. For double DIN radio applications ONLY cut and remove center rib from _____ and file edges smooth.
3. Attach the _____ to the _____ and _____ mounting brackets.
4. Attach (1) ISO spacer to the inside upper part on both Left and Right mounting brackets as shown in Fig. A.
5. Insert ISO mountable radio between Left and Right brackets and attach radio to brackets using screws supplied with radio (when possible) or screws supplied with kit.
6. Mount radio and side brackets to factory radio bezel.
- Then place radio trim bezel back into position.
7. Attach a rear support bracket to the rear of the radio components and adjust as needed to allow rear support bracket to rest in the sub-dash (optional).
8. Mount radio with brackets to sub-dash.
9. Re-attach all harnesses to radio trim bezel and re-assemble dash, (this is a tight fit and may require some patience). You may also remove the forward section shown in Fig. D below from the Left and Right mounting brackets.

NOTE: #1 - ISO trim ring _____ must be used in place of after-market radio's trim rings. For ISO mount applications, mount after-market radio components to side brackets using screws provided with radio when possible or hardware included with kit.

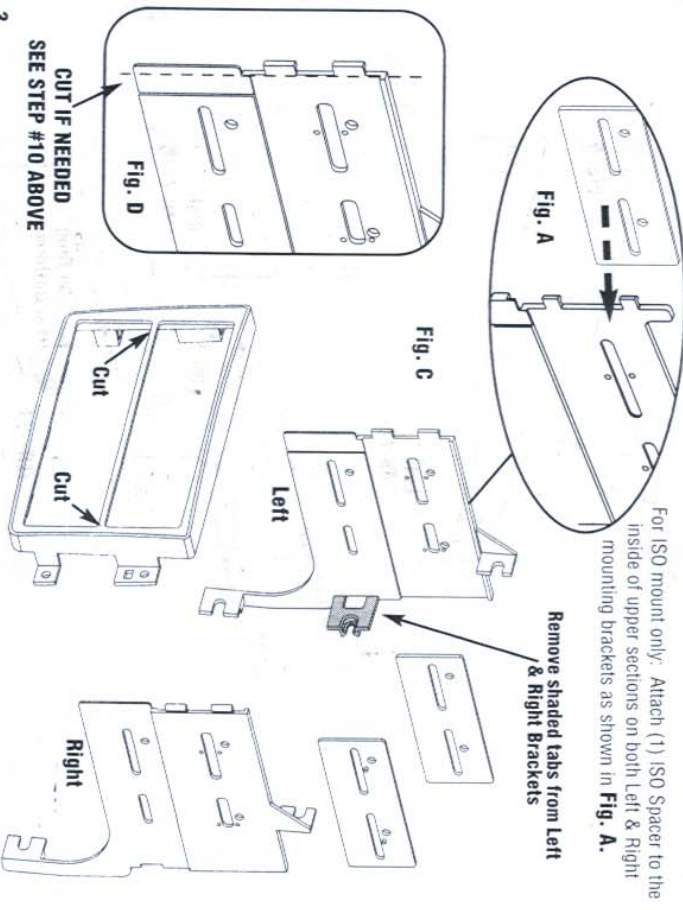

NOTES:
