



Installation manual for:
Ssang Yong Rexton II 2006 -->



Installation kit includes the following items:



- * 1X 2-ISO 100 mm. metal bracket
- * 1X Radio trim
- * 2X Mounting plates
- * 2X Mounting spacers
- * 2X Radio removal keys
- * 4X Screws

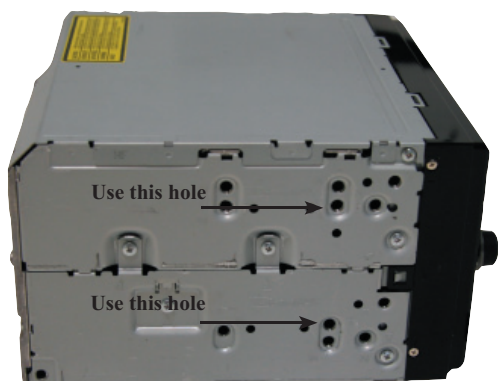

Pioneer HD1BT

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 14 & 16 marked with an arrow.
Measured from left to right.

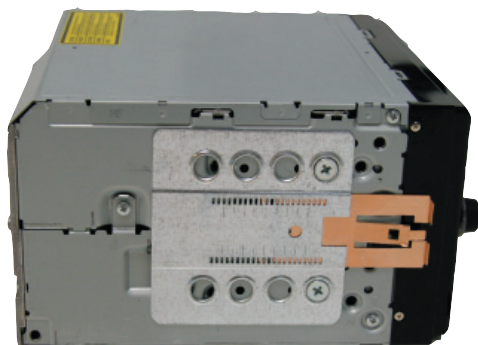

Pioneer Avic D3

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 12 & 14 marked with an arrow.
Measured from left to right.


* Mount the plates.

1




Remove the panel under the climate control panel.

2

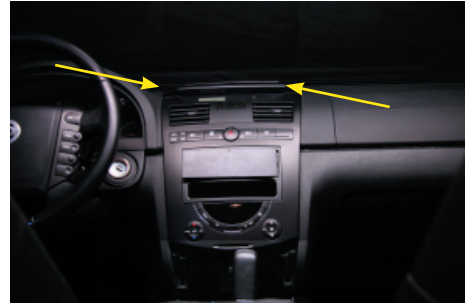

Remove the speaker grill on top of the dashboard. Remove the two which have become visible.
Remove the front panel.

3

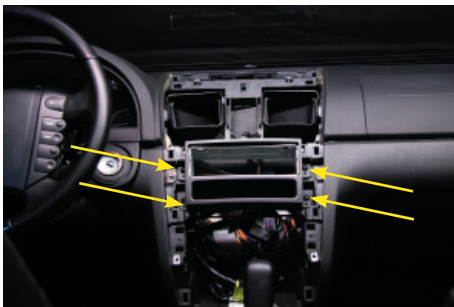

Remove the original bracket.
This is tighten by screws.

4



Place the 2-Din metal bracket and tighten the bracket by screws.

5



Place the headunit and replace all the panels.

Connect all of the needed wiring harnesses and check the connections carefully.