

Zenith



DATA SHEET

AGM BATTERY HIGH CRANKING RATE ZPC120060

Performance features

PHCA	1750A at 27°C (80°F)	5 seconds
CCA	930A at -18°C (0°F)	
HCA	1350A at 27°C (80°F)	
CA / MCA	1070A at 0°C (32°F)	
Self-Discharge 25°C (77°F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Standard Terminal	M8	
Reserve Capacity	150Min	
Charging Cycle (constant voltage)	Charge 14.5V~14.9V/ 25°C (77°F)	
	Float 13.6V~13.8V/ 25°C (77°F)	
Short circuit current	3.500A	
Operation temperature range	-15°C (-5°F) to 50°C (122°F)	

Specifications




Nominal Voltage		12V
Rated Capacity (20 hour rate)		75Ah
Dimension	Total Height (with terminals)	169.5mm (6.67 inches)
	Height	169.5mm (6.67inches)
	Length	300mm (11.81 inches)
	Width	182mm (7.17 inches)
Weight		Approx. 26.3kg (57.98lbs)

High rate discharge at 25°C (77°F)


5 sec	10 sec	20 sec	30 sec
1750A	1540A	1400A	1355A

Extended discharge at 25°C (77°F) to 10,02V

5 min.	15 min.	1h	3h	5h	10h	20h
338A	164A	53.5A	19.9A	12.4A	6.5A	3.9A

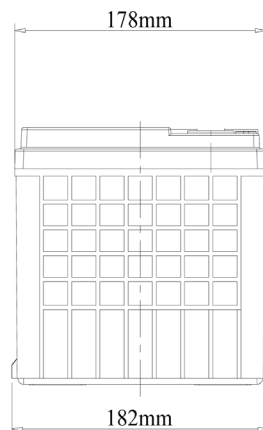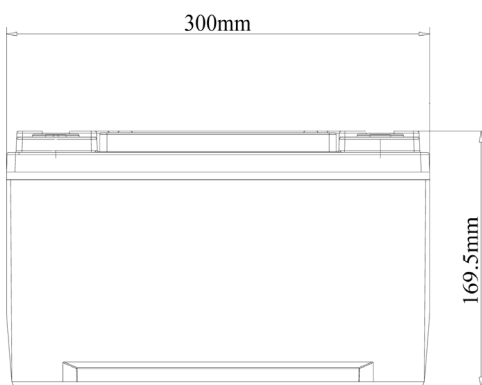

Terminal



This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

www.zenithdcbattery.com

DIVISION OF



www.unionbatteryservice.it