
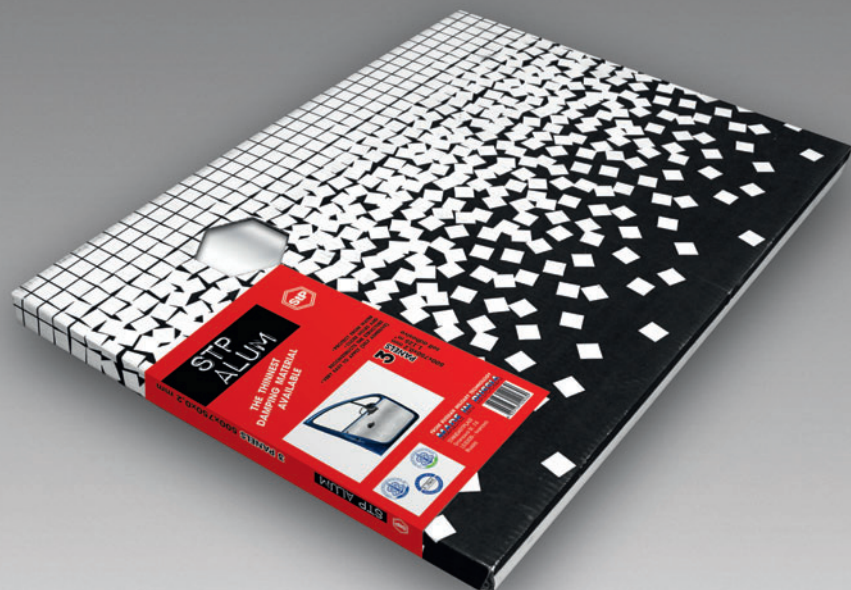


STP

STP ALUM 300B

THE THINNEST DAMPING MATERIAL AVAILABLE

- PROTECT FROM WATER
- CLOSE HOLES AND RECONSTRUCTS THE STRUCTURE
- VERY EASY TO APPLY (SELF ADHESIVE)

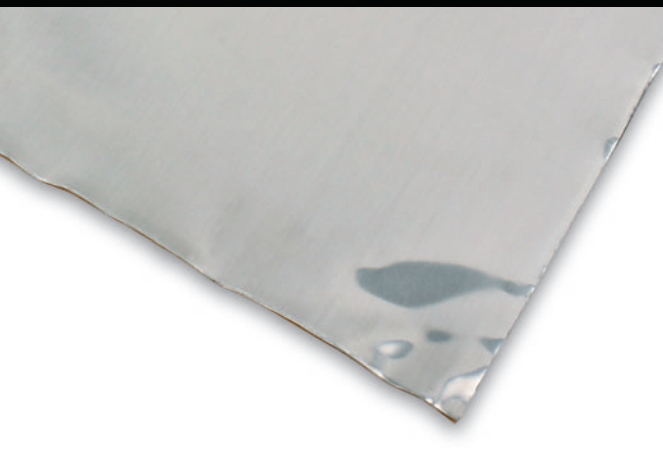


EMMA
european mobile media association
RUSSIA



3 SHEETS
530x750 mm
or
500x750 mm
or
500x800 mm
self adhesive

FROM RUSSIAN MILITARY TECHNOLOGY
MADE IN RUSSIA



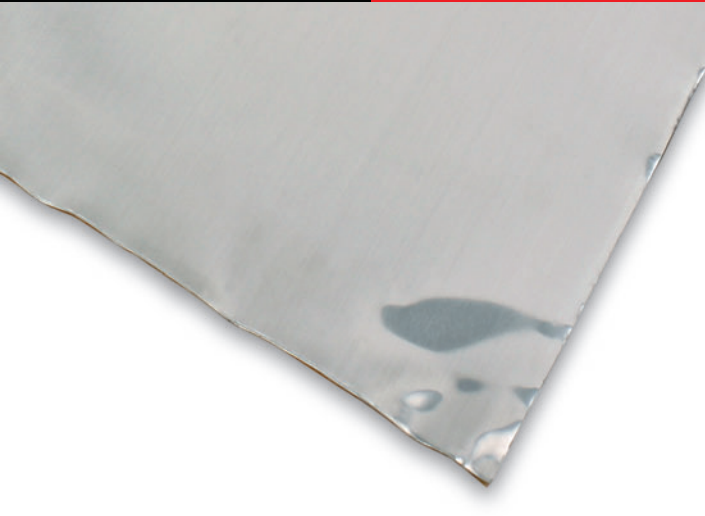

STP ALUM 300B – is a laminated assembly comprising aluminum 0,3 mm thick foil and adhesive bitumen layer with release film.

The material is intended for use at temperature from minus 45°C to plus 70°C.

Bonding strength of material with carrier not less than 5 N/cm.

Material doesn't absorb water and doesn't separate under environment influences, have anti-corrosion and hermetic properties. Can be easily attached on compound surfaces and doesn't demand heating during attached.

Coefficient nomination	Specification	Testing method
Thickness, mm	0,3	I 4.3 TS 5772
Average weight 1 m ² , kg, not less	0,92	GOST 17073
Foil weight 1 m ² , kg, not less	0,8	GOST 17073
Durability of the material connection with metal surface in the process of flaking off at the angle of 90°, N/cm, at least	5,0	I 4.8 TS 2254
Durability of the material connection with metal surface in the process of flaking off at the angle of 90° after the impact of temperature cycling from -40°C to + 70°C, N/cm, at least	5,0	I 4.8 TS 2254

STORAGE INSTRUCTIONS:

The material must be stored in its packaging in lower piles than 1,5 m in closed rooms at a minimum distance of 1 m from heating appliances avoiding moisture and direct sun. If the material is stored in non-heated rooms it is recommended before using to keep it at the temperature 20±5°C above zero for not less than 24 hours.

USAGE RECOMMENDATIONS:

This material is aimed at sealing the operational openings of different parts of the vehicle body and before the installation of the acoustics.

PLACES OF USE:

Doors.

Test made by independent laboratory