



**RETRO-CAMERA 1,4" CMD
ORIENTABILE IN BOX**


*REAR-CAMERA 1.4" CMD
ADJUSTABLE IN-BOX*



***ISTRUZIONI DI MONTAGGIO
MOUNTING INSTRUCTIONS
INSTRUCTIONS DE MONTAGE
MONTAGE-ANLEITUNGEN
INSTRUCCIONES PARA EL MONTAJE***

VM 285

INSTALLAZIONE • INSTALLATION • INSTALACIÓN




Copertura verniciabile
Cover paintable
Couverture à peindre
Abdeckung überstreichbar
Se puede pintar la cubierta



Viti / Screws / Vis / Schrauben / Tornillos
2,9x9,5 mm




Supporto superiore
Upper support
Support supérieur
Obere Hälfte
Soporte superior



Camera orientabile
Orientable camera
Caméra orientable
Ausrichtbare Kamera
Cámara giratoria



Viti / Screws / Vis / Schrauben / Tornillos
2,9x9,5 mm




Supporto inferiore
Lower support
Support inférieur
Untere Hälfte
Soporte inferior



Biadesivo
Bi-adhesive tape
Ruban bi-adhésif
Doppelseitiges Klebeband
De dos caras

**SCHEMA DI COLLEGAMENTO • CONNECTION SCHEME
DIAGRAMME DE CONNEXION • ANSCHLUß-DIAGRAMMA
ESQUEMA DE CONEXION**

- **NON MODIFICARE PER NESSUN MOTIVO IL CAVO DELLA TELECAMERA.**
- **BY NO MEANS, NEVER MODIFY THE CABLE OF THE REAR-CAMERA.**
- **NE MODIFIER EN AUCUN CAS LE CÂBLE DE LA CAMÉRA DE REcul.**
- **EGAL AUS WELCHEM GRUND, KABEL DER RUECKFAHR-KAMERA NIEMALS MODIFIZIEREN.**
- **NO MODIFICAR POR NINGUN MOTIVO EL CABLE DE LA RETRO-CAMARA.**

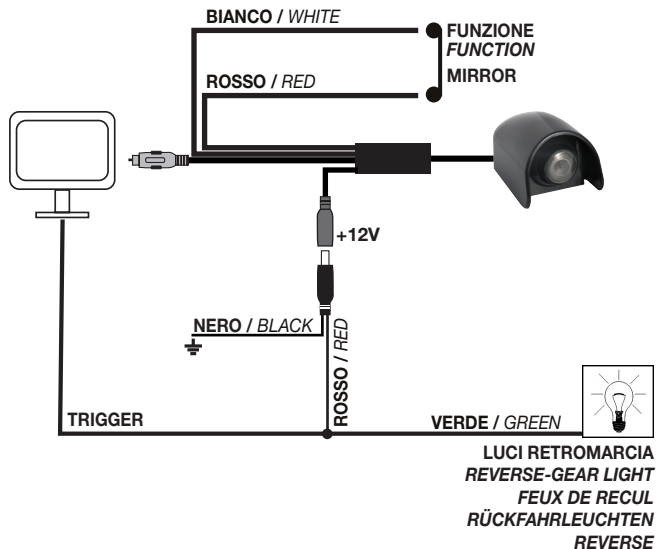

**CARATTERISTICHE TECNICHE • TECHNICAL SPECIFICATIONS
CARACTÉRISTIQUES TECHNIQUES • TECHNISCHE DATEN
CARACTERISTICAS TECNICAS**

Sistema / System / Système / Sistema TV	PAL
Sensore / Sensor / Senseur	1/4" CMD High Resolution
Immagine / Picture / Image / Bild / Imagen	Mirror (Speculare)
Risoluzione / Resolution / Résolution / Auflösung / Resolución.....	
280 K (P) / Col. 480 TVL	
Luminosità / Brightness / Luminosité / Helligkeit / Brillo	1,8 Lux
Fotogrammi per secondo / Frames per second.....	25 fps
Angolo di visuale / Vision Angle / Angle de vision / Sichtwinkel / Angulo de vision ..	170°
Uscita video / Video-exit / Sortie vidéo / Video-Ausgang / Salida video.....	
1V p-p 75 Ohm	
Impermeabilità / Water-Tightness / Imperméabilité / Wasserdicht / Impermeable.....	
IP 68 waterproof	
Temperatura d'esercizio / Working temperature / Température de fonctionnement Betriebstemperatur / Temperatura de funcionamiento	-20°C ~50°C
Dimensioni / Dimensions / Dimensions / Abmessungen / Dimensiones	
60 x32 x35 mm	
Box... Verniciabile / Paintable / Peut être peint / Überstreichbar / Se puede pintar	
Alimentazione / Power supply / alimentation / Stromzufuhr / Alimentacion	12V



S.p.A. - Via F.lli Cervi, 167/C - 42124 **Reggio Emilia** (Italy)
Tel. ++39 0522 941621 - Fax ++39 0522 942452
www.phonocar.com - e-mail:info@phonocar.it