



Installation Manual Double DIN Set

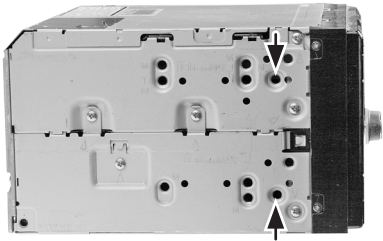

(sample photo)

Mount the metal brackets with the double DIN head unit

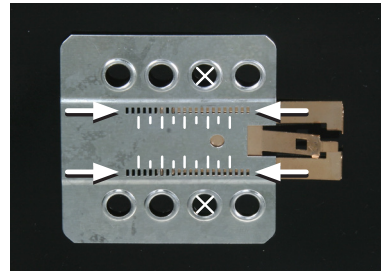

(sample photo)

The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)



7. Push the Metal Frame into the fascia plate, place both into the dashboard.

Connect all required circuit points and push the double DIN head unit in the metal frame until it snaps in. Fix the fascia plate with the original screws, place the trim frame.

Reinstall everything in reverse order to finish installation.


Pioneer

Installation Manual for Double DIN kit
standard: 381294-04 | rubber-touch: 391294-04

Compatible with these Pioneer devices

Pioneer Navigation


- Opel Agila B 2008 →
- Suzuki Splash

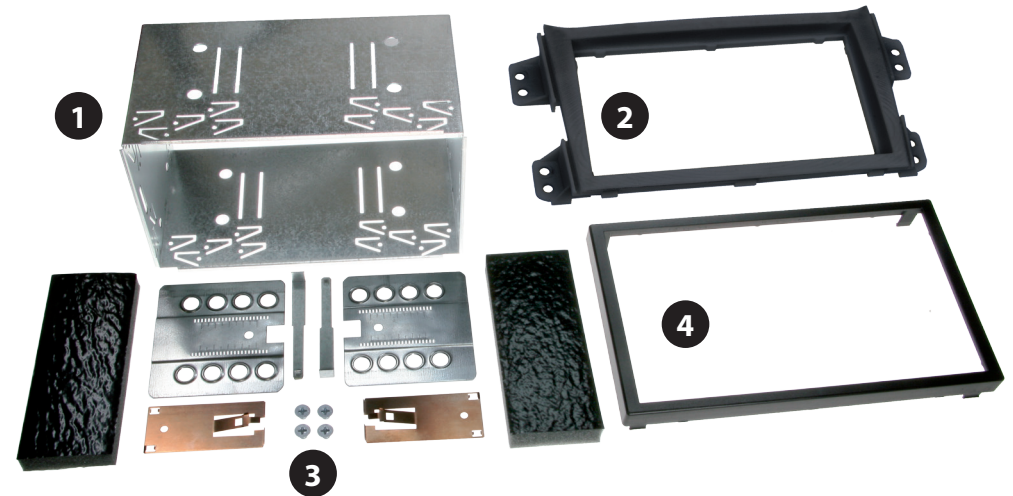


Double DIN Set contents

- (1) Metal Frame
- (2) Fascia Plate
- (3) Installation Kit
- (4) Trim Frame

Installation Manual Double DIN Set

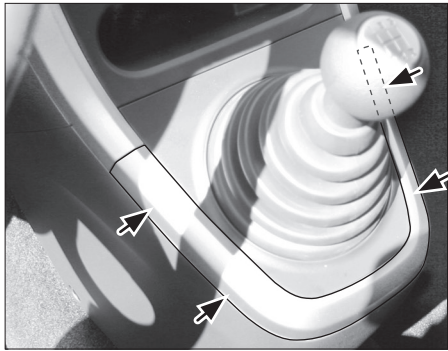


1. Remove the thin silver trim frame surrounding the gear shift

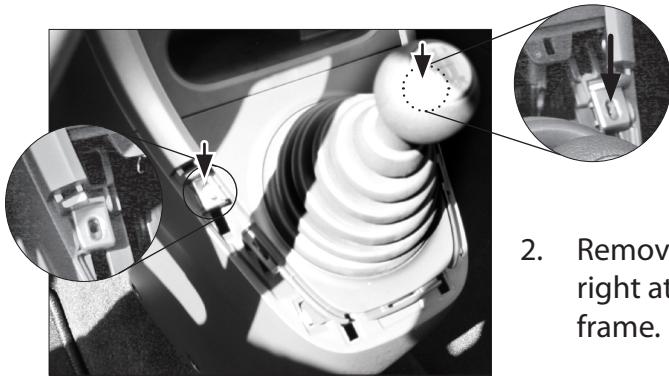


2. Remove the 2 screws left and right at the base of the silver trim frame.



3. Remove the gear lever cap.

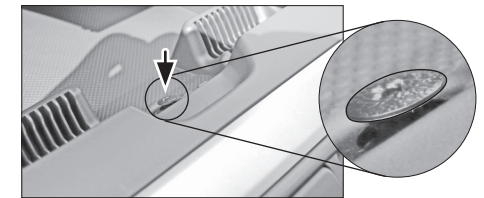

4. Open up the top glove box cover, remove the plastic screw located on the inside, gently.

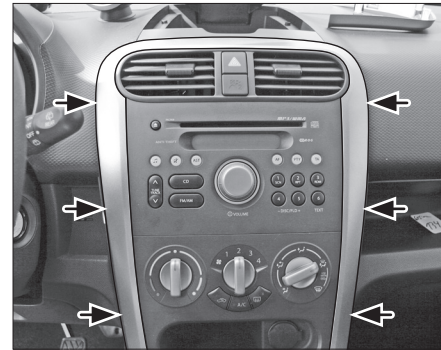

5. Remove the thin silver trim frame, which is clipped to the dashboard.



6. Remove the 4 Phillips screws, remove the OEM Radio.

*All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*