

Normal Impedance: 4Ω
Power RMS: 90W
Voice Coil \varnothing : 32mm
Sensitivity: 89dB
Frequency Response: 50Hz - 5.000Hz
Fs: 47Hz


Frame: CFT Aluminium
Cone: Carbon Fiber
Magnet: Ferrite
Surround: Rubber
Voice Coil winding: Copper
Voice Coil support: Aluminium

SPECIFICATIONS

Fs: 47.3990	VAS: 19.0987
Fs Added Mass: 36.2551	dB SPL: 89.2365
Fs Known Vol: 0.0000	L 1kHz: 0.4687
Added Mass: 10.3000	L 10kHz: 0.2139
Known Vol: 0.0000	CAS: 1.367745E-0007
Diameter: 130.0000	RAS: 9502.3140
ZMax: 26.1384	MAS: 82.4322
ZMax Added Mass: 23.9336	RAT: 73051.4400
ZMax Known Vol: 0.0000	SD: 0.0133
Z F1F2: 9.4271	LCES: 29.5525
Re: 3.4000	CMES: 381.5122
Rms: 1.6741	RES: 22.7384
Qms: 2.5835	MMD: 13.6573
Qes: 0.3863	RMT: 12.8701
Qts: 0.3361	ETA: 0.5054
Cms: 0.7763	Z Min: 4.0225
Mms: 14.5228	Z AVG: 10.2475
BL: 6.1698	



FREQUENCY RESPONSE

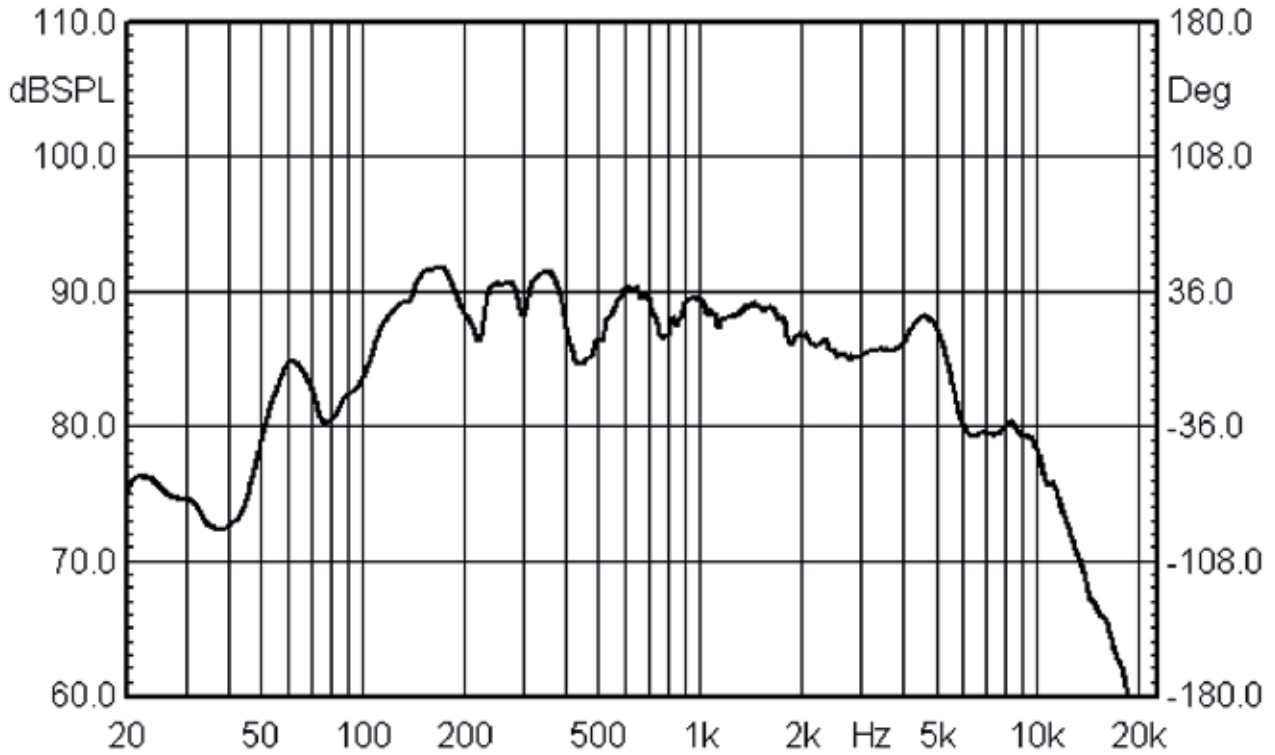

IMPEDANCE

