


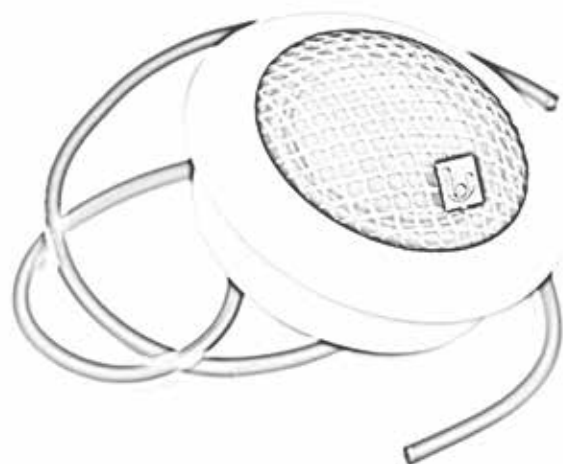

Normal Impedance: 4Ω
Power RMS (filtered 12dB 6000hz): 100W
Power RMS (filtered 12dB 3500hz): 60W
Voice Coil $\varnothing$: 25mm
Sensitivity: 90dB
Frequency Response: 3.000Hz - 20.000Hz
Fs: 1093Hz

Frame: Plastic
Dome: Polyester
Magnet: Ferrite
Surround: Polyester
Voice Coil winding: Copper
Voice Coil support: Aluminium

SPECIFICATIONS

Fs: 1093.0100	VAS: 0.0000
Fs Added Mass: 0.0000	dB SPL: 0.0000
Fs Known Vol: 0.0000	L 1kHz: 0.5284
Added Mass: 0.0000	L 10kHz: 0.0228
Known Vol: 0.0000	CAS: 0.000000E+0000
Diameter: 0.0000	RAS: 0.0000
ZMax: 10.1680	MAS: 0.0000
ZMax Added Mass: 0.0000	RAT: 0.0000
ZMax Known Vol: 0.0000	SD: 0.0000
Z F1F2: 5.8797	LCES: 0.2090
Re: 3.4000	CMES: 101.4254
Rms: 0.0000	RES: 6.7680
Qms: 4.7142	MMD: 0.0000
Qes: 2.3683	RMT: 0.0000
Qts: 1.5764	ETA: 0.0000
Cms: 0.0000	Z Min: 3.6710
Mms: 0.0000	Z AVG: 4.0828
BL: 0.0000	



FREQUENCY RESPONSE

