



Normal Impedance: 4Ω
Power RMS: 70W
Voice Coil Ø: 26mm
Sensitivity: 91dB
Frequency Response: 50Hz - 7.000Hz
Fs: 63Hz


Frame: Aluminium
Cone: Aluminium / Carbon Fiber
Magnet: Ferrite
Surround: Rubber
Voice Coil bi-wire winding: Copper
Voice Coil support: Glass Fiber

SPECIFICATIONS

Fs: 63.3679	VAS: 13.2322
Fs Added Mass: 46.0083	dB SPL: 87.6939
Fs Known Vol: 0.0000	L 1kHz: 0.2503
Added Mass: 10.2000	L 10kHz: 0.1185
Known Vol: 0.0000	CAS: 9.476167E-0008
Diameter: 129.0000	RAS: 4800.8850
ZMax: 21.8601	MAS: 66.5685
ZMax Added Mass: 17.4078	RAT: 33854.1800
ZMax Known Vol: 0.0000	SD: 0.0131
Z F1F2: 8.2320	LCES: 8.5347
Re: 3.1000	CMES: 739.1139
Rms: 0.8201	RES: 18.7601
Qms: 5.5207	MMD: 10.5255
Qes: 0.9123	RMT: 5.7830
Qts: 0.7829	ETA: 0.3543
Cms: 0.5547	Z Min: 3.4396
Mms: 11.3712	Z AVG: 6.1956
BL: 3.9224	



FREQUENCY RESPONSE

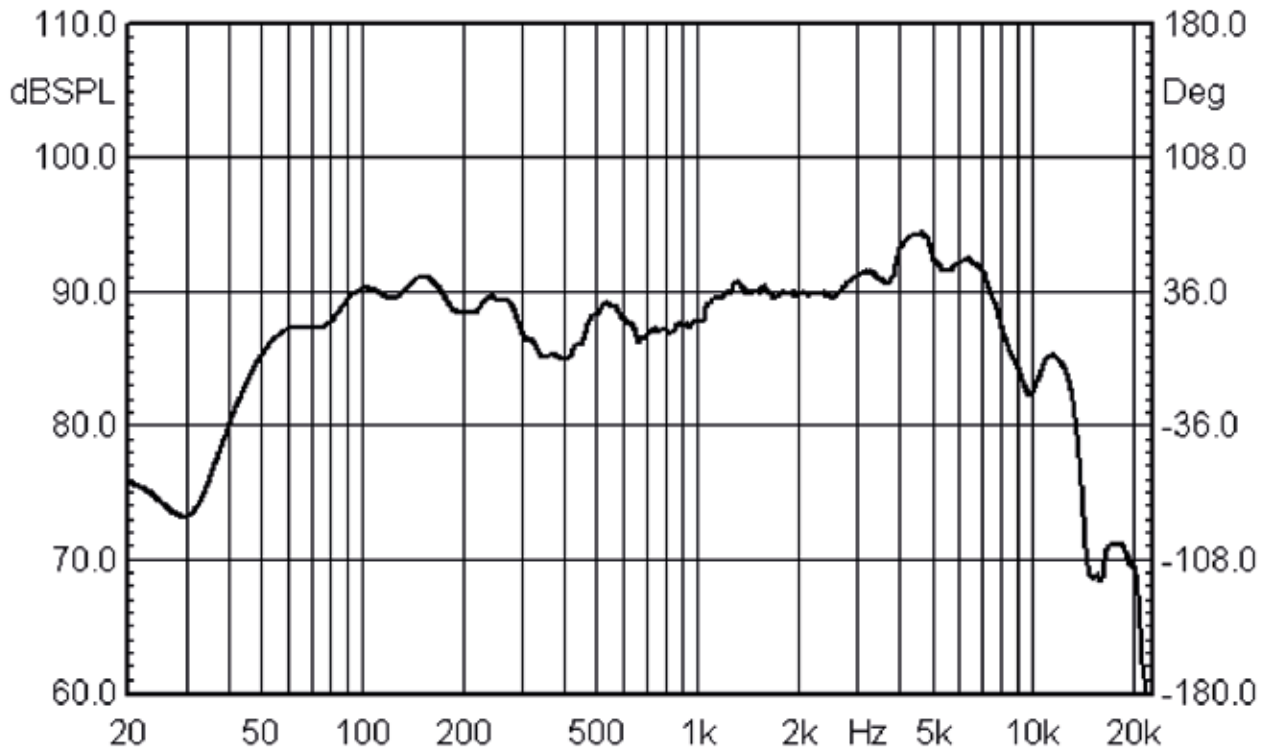

IMPEDANCE

