



Normal Impedance: 4Ω
Power RMS (filtered 12dB 6000hz): 100W
Power RMS (filtered 12dB 3500hz): 60W
Voice Coil \varnothing : 25mm
Sensitivity: 90dB
Frequency Response: 2.800Hz - 20.000Hz
Fs: 970Hz


Frame: Aluminium
Dome: Polyester
Magnet: Ferrite
Surround: Polyester
Voice Coil winding: Copper
Voice Coil support: Aluminium

SPECIFICATIONS

Fs: 970.2650	VAS: 0.0000
Fs Added Mass: 0.0000	dBSPL: 0.0000
Fs Known Vol: 0.0000	L 1kHz: 0.0000
Added Mass: 0.0000	L 10kHz: 0.0343
Known Vol: 0.0000	CAS: 0.000000E+0000
Diameter: 0.0000	RAS: 0.0000
ZMax: 12.0052	MAS: 0.0000
ZMax Added Mass: 0.0000	RAT: 0.0000
ZMax Known Vol: 0.0000	SD: 0.0000
Z F1F2: 6.2942	LCES: 0.3144
Re: 3.3000	CMES: 85.5819
Rms: 0.0000	RES: 8.7052
Qms: 4.5418	MMD: 0.0000
Qes: 1.7217	RMT: 0.0000
Qts: 1.2485	ETA: 0.0000
Cms: 0.0000	Z Min: 3.6224
Mms: 0.0000	Z AVG: 4.2378
BL: 0.0000	



FREQUENCY RESPONSE

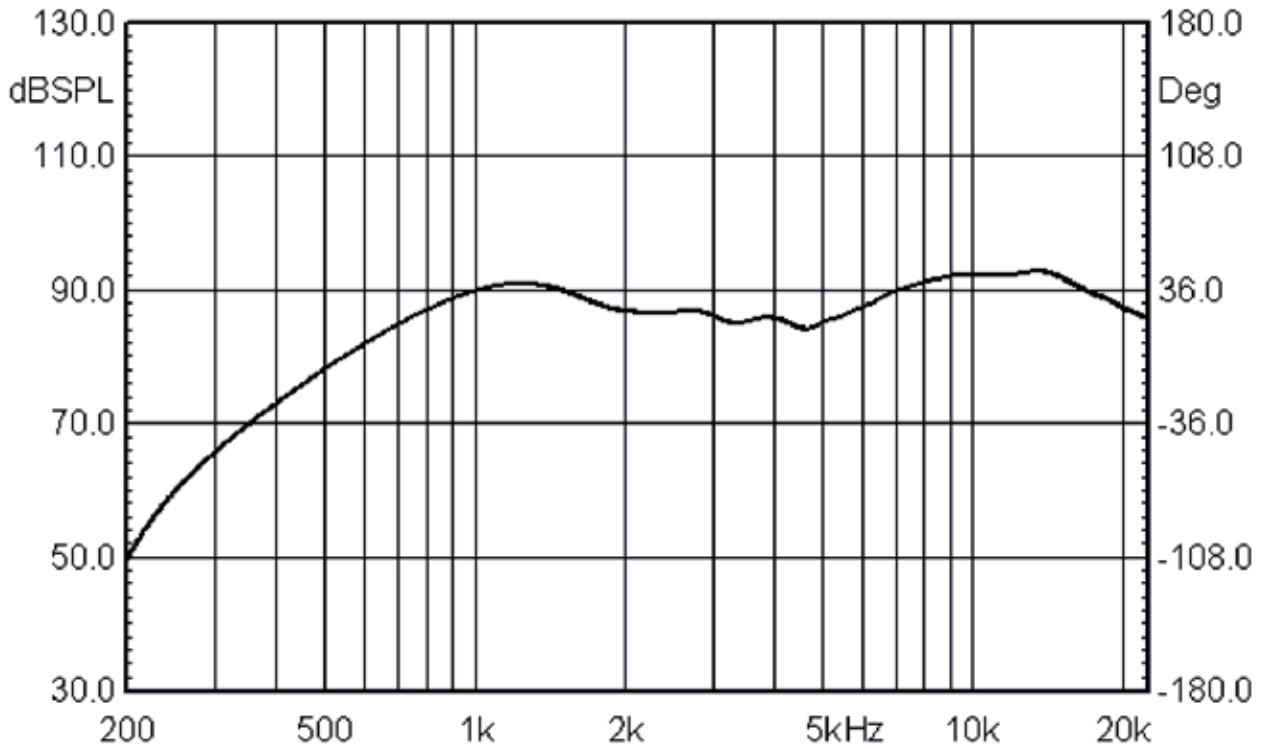

IMPEDANCE

