



Normal Impedance: 4Ω
Power RMS: 90W
Voice Coil \varnothing : 32mm
Sensitivity: 89dB
Frequency Response: 50Hz - 8.000Hz
Fs: 61Hz


Frame: Aluminium
Cone: Aluminium / Carbon Fiber
Magnet: Ferrite
Surround: Rubber
Voice Coil bi-wire winding: Copper
Voice Coil support: Glass Fiber

SPECIFICATIONS

Fs: 71.3610	VAS: 8.2948
Fs Added Mass: 57.1474	dB SPL: 87.7898
Fs Known Vol: 0.0000	L 1kHz: 0.2757
Added Mass: 8.0000	L 10kHz: 0.1624
Known Vol: 0.0000	CAS: 5.940289
Diameter: 129.0000	RAS: 8943.8690
ZMax: 20.6405	MAS: 83.7357
ZMax Added Mass: 18.6821	RAT: 55941.3100
ZMax Known Vol: 0.0000	SD: 0.0131
Z F1F2: 8.2531	LCES: 9.2129
Re: 3.3000	CMES: 539.9115
Rms: 1.5278	RES: 17.3405
Qms: 4.1978	MMD: 13.4580
Qes: 0.7989	RMT: 9.5559
Qts: 0.6711	ETA: 0.3622
Cms: 0.3478	Z Min: 4.4055
Mms: 14.3037	Z AVG: 7.8068
BL: 5.1471	



FREQUENCY RESPONSE

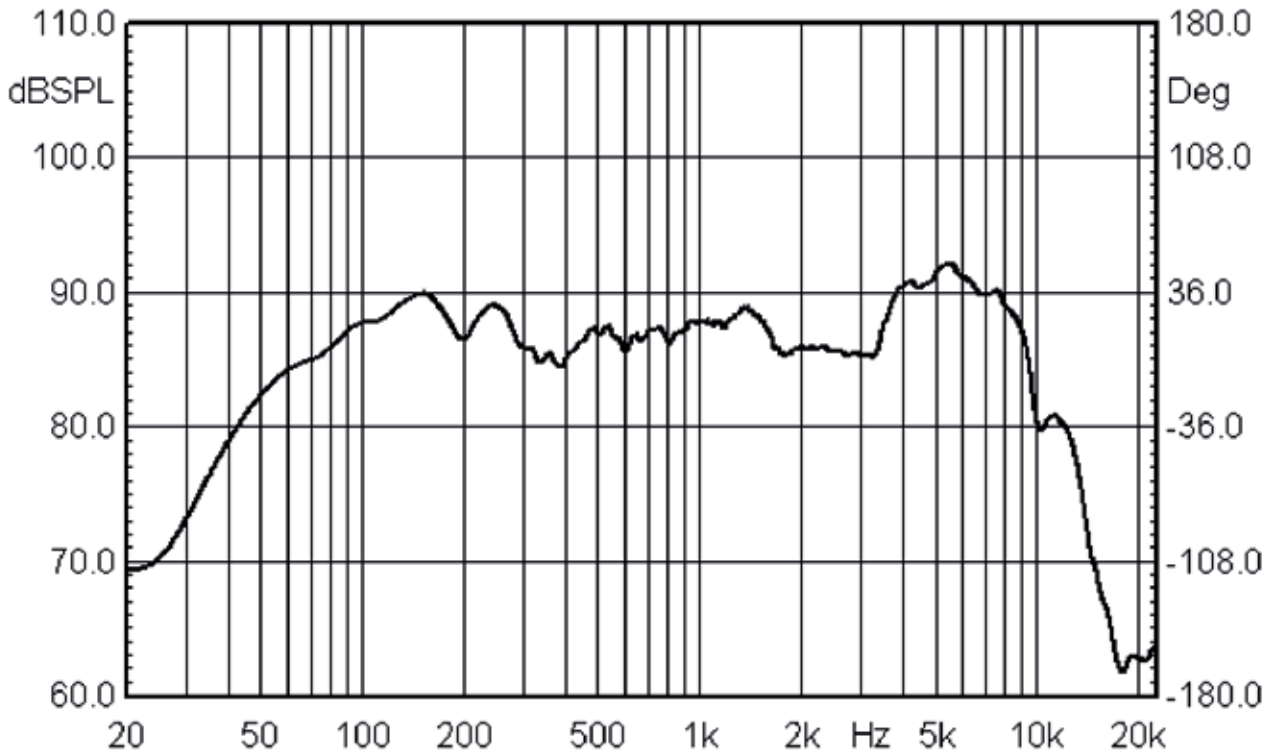

IMPEDANCE

