

ZPC120047


Characteristics

Capacity 25°C (77°F)	20 hour rate	60AH
Polarity		SX
PHCA at 80°F (27°C) for 5 seconds		1340A
CCA at 0°F (-18°C)		700A
CA/MCA at 32°F (0°C)		840A
HCA at 80°F (27°C)		1010A
Short circuit current		800A
Operating temperature range	-5°F (-15°C) to 122°F (50°C)	
Standard Terminal		M6M


Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		60Ah
Dimension	Total Height	261mm (10.28 inches)
	Height	247mm (9.72 inches)
	Length	220mm (8.66 inches)
	Width	121mm (9.72 inches)
Weight		Approx. 20.5kg (45.1lbs)
Quantity per pallet		45 pcs

Discharge characteristics

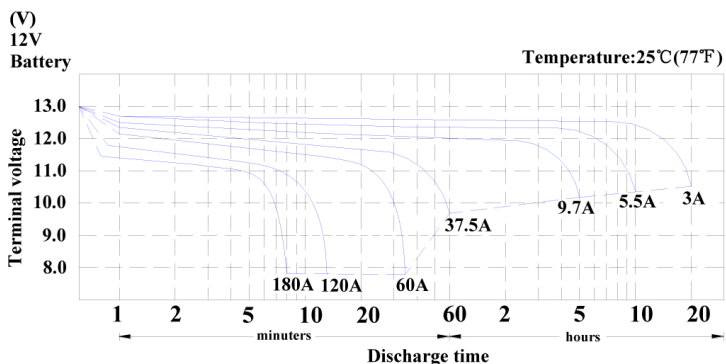

Physical characteristics

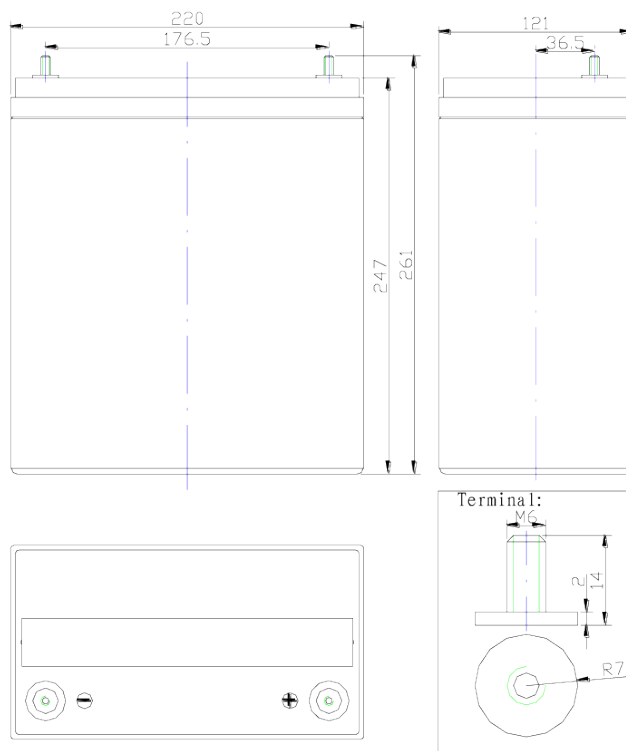

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

DIVISION OF



www.unionbatteryservice.com
www.zenithdcbattery.com