

# ZPC120065

## Characteristics

Capacity 25°C (77°F)	20 hour rate	100AH
Polarity		SX
High rate discharge at 77° F (25°C)	5 sec.	1950A
	10 sec.	1745A
	20 sec.	1500A
	30 sec.	1355A
PHCA at 80°F (27°C) for 5 seconds		1950A
CCA at 0°F (-18°C)		965A
CA/MCA at 32°F (0°C)		1170A
HCA at 80°F (27°C)		1380A
Short circuit current		3500A
Operating temperature range	-5°F (-15°C) to 122°F (50°C)	
Standard Terminal		DT


## Extended discharge at 77°F (25°C) to 10.02V

F.V/Time	5M	15M	1HR	3HR	10HR	20HR
10.02V	382A	188A	60A	25.1A	9.65A	5.15A

## Specifications


Nominal Voltage		12V
Rated Capacity (20 hour rate)		100Ah
Dimension	Total Height	237mm (9.33 inches)
	Height	214mm (8.43 inches)
	Length	307mm (12.09 inches)
	Width	169mm (6.65 inches)
Weight		Approx. 32.2kg (70.84lbs)
Quantity per pallet		36 pcs

## Physical characteristics

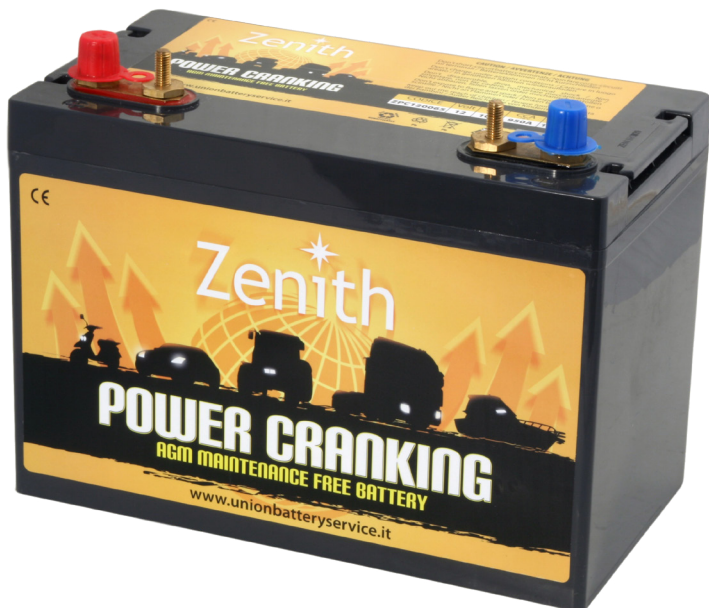

### Terminal Type: DT

Positive Negative

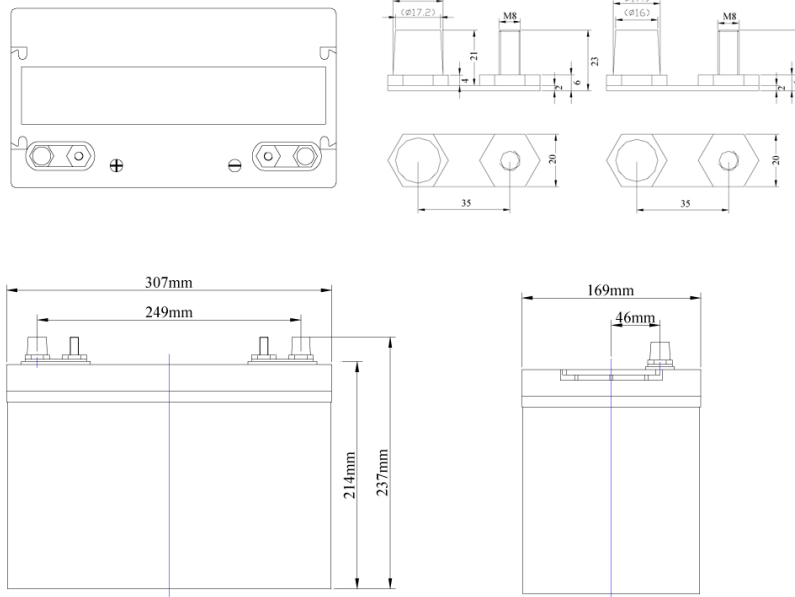

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

DIVISION OF



[www.unionbatteryservice.com](http://www.unionbatteryservice.com)  
[www.zenithdcbattery.com](http://www.zenithdcbattery.com)