




Installation Manual Double DIN Kit

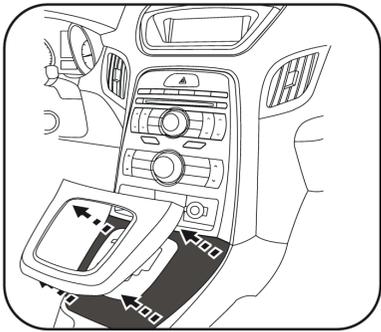


1. Disconnect the negative battery terminal to prevent an accidental short circuit
2. Unclip and remove the shifter trim panel.

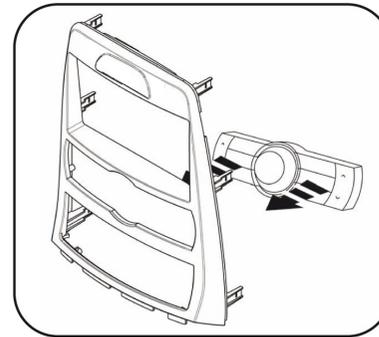


5. Attach the climate control unit and the hazard switch to the trim plate using the factory hardware.
6. Unclip and remove the shifter trim panel.

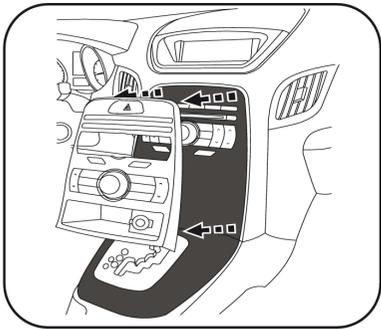


3. Unclip and remove the radio/climate control trim panel

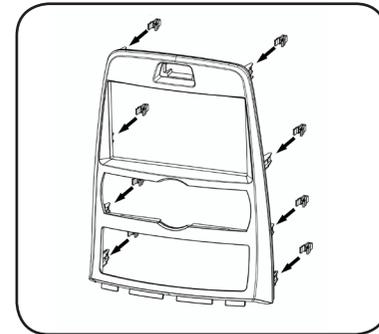

7. Attach the 8 panel clips to the trim plate

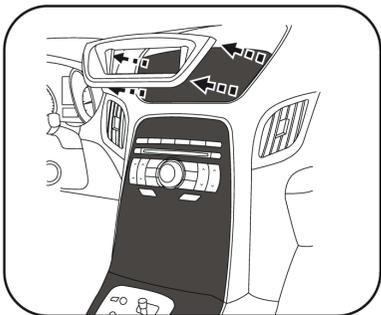

4. Unclip and remove the display trim panel above radio.
Remove 4 Phillips screws securing the radio.
Remove 4 Phillips screws securing the climate control to the factory trim panel

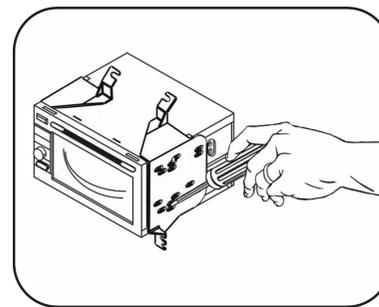

8. Attach the Double DIN brackets to the Pioneer unit, connect the wiring harness.
Reassemble dash in reverse order of disassembly.