




CODICE/CODE: ZTB120150

Batteria al piombo ad acido libero, DEEP-CYCLE (uso ciclico)
Flooded DEEP-CYCLE battery




Volt		12V
Capacity/capacità 25°C	20h	200Ah
	5h	165Ah
Capacity affected by Temperature/Effetti della temperature sulla capacità	40°C	102%
	25°C	100%
	10°C	80%
	0°C	60%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 1 month storage	90%
	after 2 month storage	75%
	after 3 month storage	60%
Charge cycle/ Ciclo di carica	Wa	"I": max. 30Amp, min. 20Amp
	IWa	"In": max. 25Amp, min. 15mp


Battery Dimensions/ Dimensioni batteria	L/L	395mm
	W/P	177mm
	H/A	367mm
	USA type	185
Weight/peso		51.6Kg
Electrolyte/elettrolita		15.06lt
Pcs per pallet /pz. per pallet		14
Terminal/terminal		DT
Case/contenitore		PP

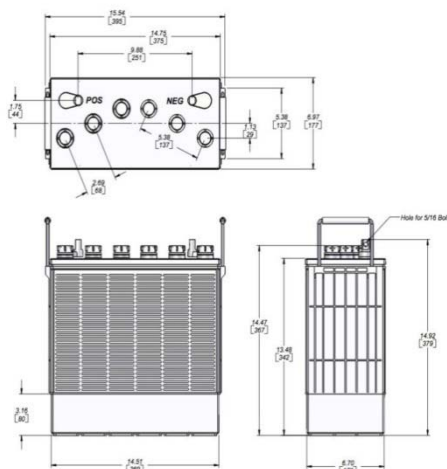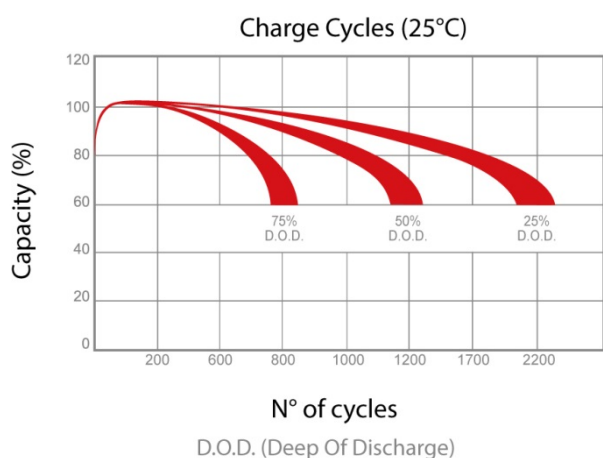

Ciclo di carica "IWa" – "IWa" charge cycle

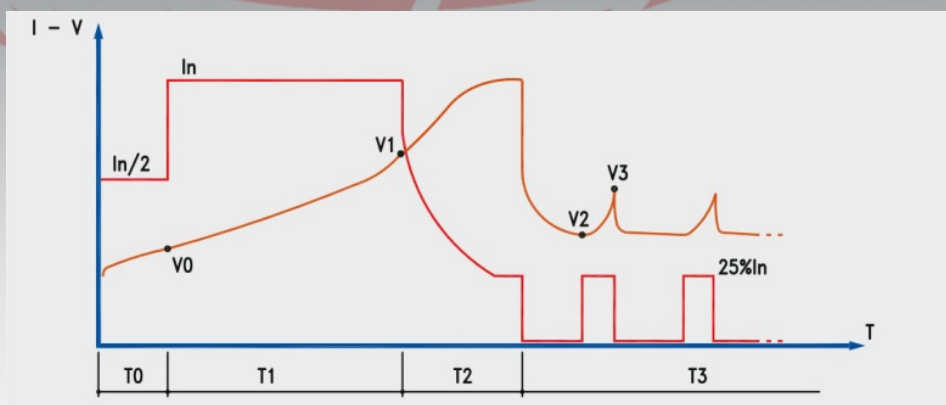

Ciclo di carica "Wa" – "Wa" charge cycle

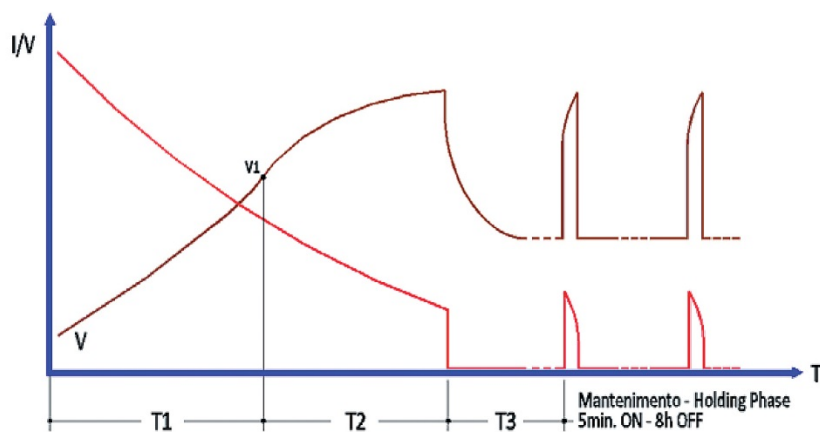

DUAL TERMINAL (DT)