

CODICE/CODE: **ZTB060140**




Batteria al piombo ad acido libero, DEEP-CYCLE (uso ciclico)

Flooded DEEP-CYCLE battery




| | | |
|--|-----------------------|------------------------------|
| Volt | | 6V |
| Capacity/capacità 25°C | 20h | 330Ah |
| | 5h | 271Ah |
| Capacity affected by Temperature/Effetti della temperature sulla capacità | 40°C | 102% |
| | 25°C | 100% |
| | 10°C | 80% |
| | 0°C | 60% |
| Self-Discharge 25°C Capacity / Autoscarica a 25°C | after 1 month storage | 90% |
| | after 2 month storage | 75% |
| | after 3 month storage | 60% |
| Charge cycle/ Ciclo di carica | Wa | "I": max. 50Amp, min. 35Amp |
| | IWa | "In": max. 45Amp, min. 25Amp |


| | | |
|--|----------|---------|
| Battery Dimensions/ Dimensioni batteria | L/L | 298mm |
| | W/P | 181mm |
| | H/A | 373mm |
| | USA type | 305 |
| Weight/peso | | 43.5Kg |
| Electrolyte/elettrolita | | 11.87Lt |
| Pcs per pallet /pz. per pallet | | 15 |
| Terminal/terminal | | DT |
| Case/contenitore | | PP |

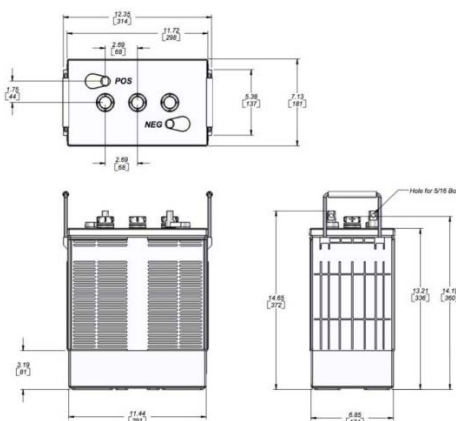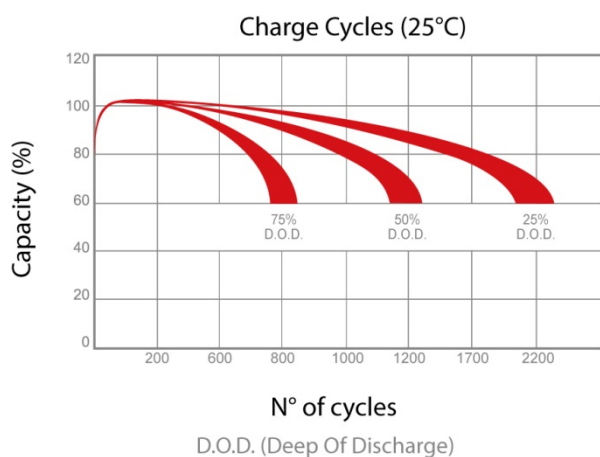

Ciclo di carica "IWa" – "IWa" charge cycle

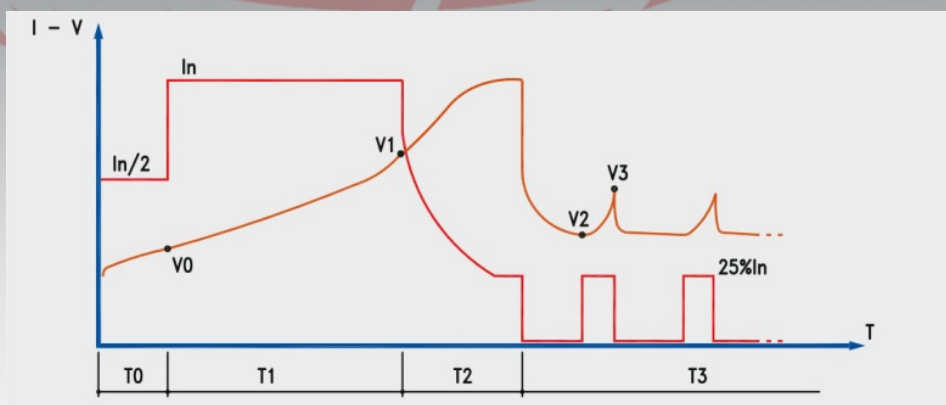

Ciclo di carica "Wa" – "Wa" charge cycle

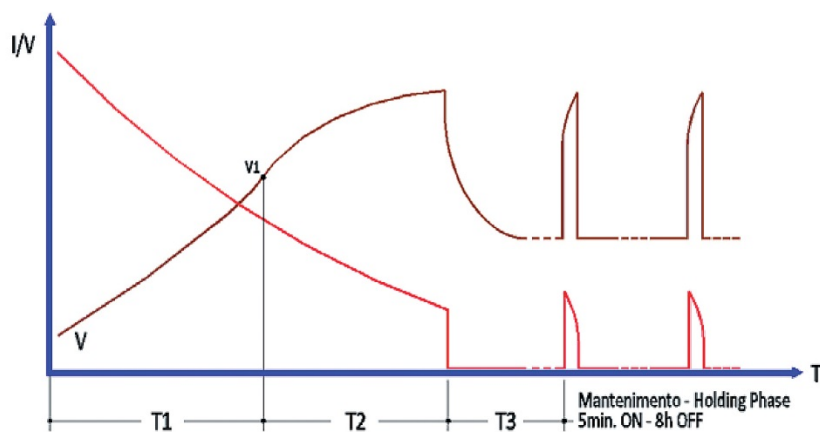

DUAL TERMINAL (DT)