

CODICE/CODE: **ZTB060115**


Batteria al piombo ad acido libero, DEEP-CYCLE (uso ciclico)
Flooded DEEP-CYCLE battery




Volt		6V
Capacity/capacità 25°C	20h	240Ah
	5h	195Ah
Capacity affected by Temperature/Effetti della temperature sulla capacità	40°C	102%
	25°C	100%
	10°C	80%
	0°C	60%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 1 month storage	90%
	after 2 month storage	75%
	after 3 month storage	60%
Charge cycle/ Ciclo di carica	Wa	"I": max. 30Amp, min. 25Amp
	IWa	"In": max. 30Amp, min. 15Amp

Battery Dimensions/ Dimensioni batteria	L/L	244mm
	W/P	190mm
	H/A	274mm
	USA type	DIN
Weight/peso		29.5Kg
Electrolyte/elettrolita		8.3Lt
Pcs per pallet /pz. per pallet		30
Terminal/terminal		AP
Case/contenitore		PP

Ciclo di carica "IWa" – "IWa" charge cycle

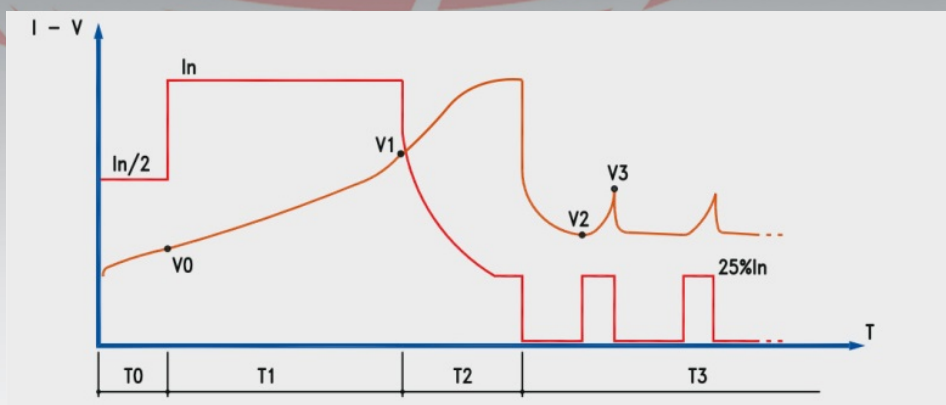

Ciclo di carica "Wa" – "Wa" charge cycle

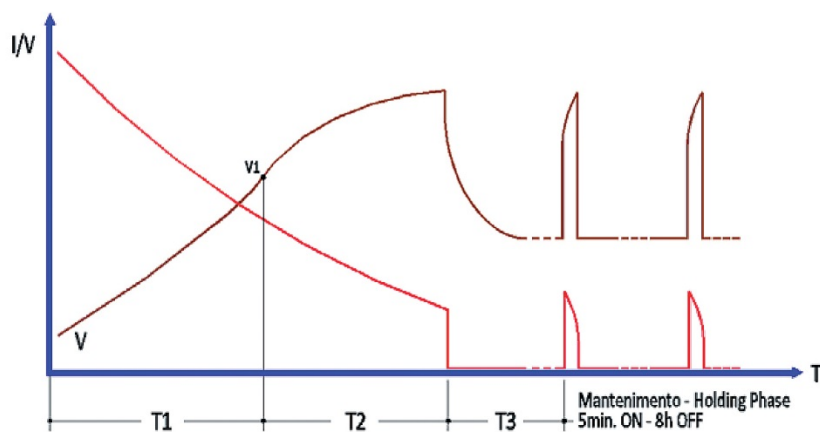

AUTOMOTIVE POST TERMINAL (AP)