

CODICE/CODE: **ZTB120110**

Batteria al piombo ad acido libero,
DEEP-CYCLE (uso ciclico)


Flooded DEEP-CYCLE battery




Volt		12V
Capacity/capacità 25°C	20h	105Ah
	5h	80Ah
Capacity affected by Temperature/Effetti della temperature sulla capacità		
40°C		102%
25°C		100%
10°C		80%
0°C		60%
Self-Discharge 25°C Capacity / Autoscarica a 25°C		
after 1 month storage		90%
after 2 month storage		75%
after 3 month storage		60%
Charge cycle/ Ciclo di carica	Wa	"I": max. 12Amp, min. 10Amp
	IWa	"In": max. 12Amp, min. 6mp

Battery Dimensions/ Dimensioni batteria	L/L	304mm
	W/P	175mm
	H/A	220mm
	USA type	-
Weight/peso		24.0Kg
Electrolyte/elettrolita		5.40Lt
Pcs per pallet /pz. per pallet		56
Terminal/terminal		AP
Case/contenitore		PP

Ciclo di carica "IWa" – "IWa" charge cycle

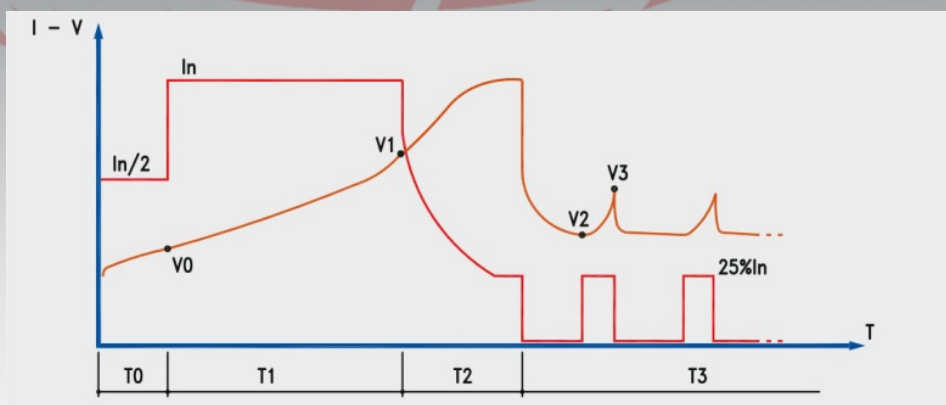

Ciclo di carica "Wa" – "Wa" charge cycle

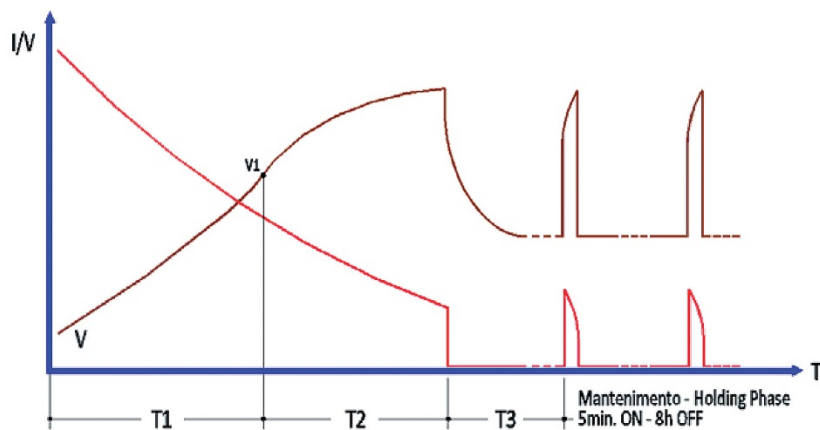

AUTOMOTIVE POST TERMINAL (AP)