

AUDITOR RSB-300

Subwoofer



WHAT MAKES THE DIFFERENCE

- High power handling
- Ported or sealed enclosure
- Parallel voice coil wiring possible even more SPL

TECHNICAL CHARACTERISTICS

Diameter: 12" (300mm)
Voice coil diameter: 2" (50mm)
Polypropylene cone
Max. power: 600W

Nom. power: 300W RMS
Sensitivity (2.83V/1m): 90dB
Impedance: 4+4 Ohms
Frequency response: 30Hz - 500kHz

Performance
CREATE YOUR SOUND




AUDITOR RSB-300

Subwoofer (12")




- Polypropylene cone
- Steel basket
- 4 Ω dual voice coil

FREQUENCY RESPONSE/IMPEDANCE

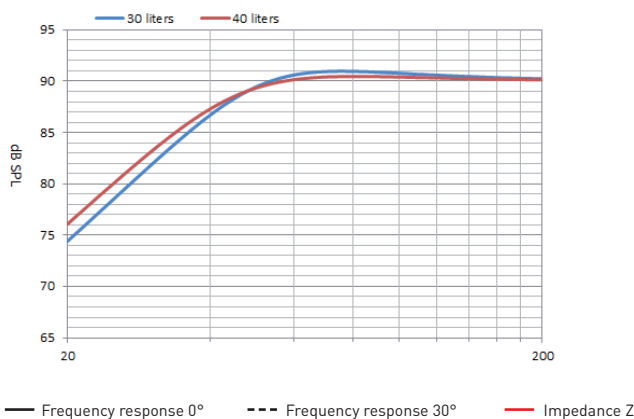

MECHANICAL DRAWING

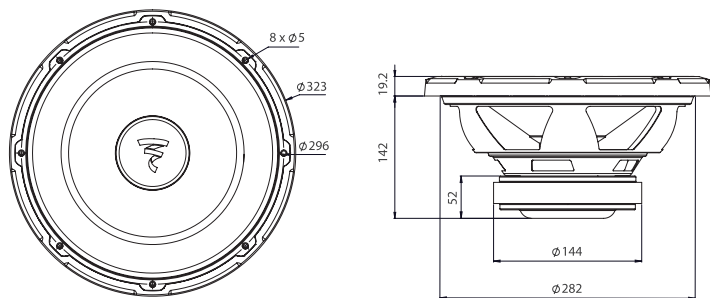

SPECIFICATIONS

Nominal power	300W RMS	
Maximum power	600W	
Sensitivity (2,83V/1m)	90dB	
Cone type	Polypropylene	
Surround type	Butyl	
Nom. impedance	4Ω + 4Ω	
DC resistance	3.2Ω + 3.2Ω	
VC diameter	50mm	2"
Net weight	4300g	9.48lbs

PARAMETERS

Fs	25Hz
Vas	93l
Qts	0.47
Qes	0.52
Qms	4.5
Re	3.2 Ω + 3.2 Ω
Sd	471cm ²
Cms	0.3mm/N
Mms	130g
Bl	8.3 N/A

Performance
CREATE YOUR SOUND

