


S6510-44

10" Dual 4Ω Square Subwoofer

Parameters



Los parámetros, Paramètres, Parameter

Fs: 34 Hz
Qms: 4.755
Cms: 0.099 mm/N
Mms: 219.7 g
Rms: 9.9 kg/s
Vas: 1.157 ft³ (32.77 liters)
Xmax: 0.61 in (15.49 mm)
D: 8.66 in (220 mm)
Sd: 75.02 in² (484 cm²)
Vd: 45.65 in³ (0.748 liters)
Qes: 0.812
Re: 1.73 Ω
Bl: 10 Tm
Prms: 500 Watts
Qts: 0.694
η₀: 0.153%
SPL₀: 84.5 dB
SPL 2.83V/1m: 90.97 dB

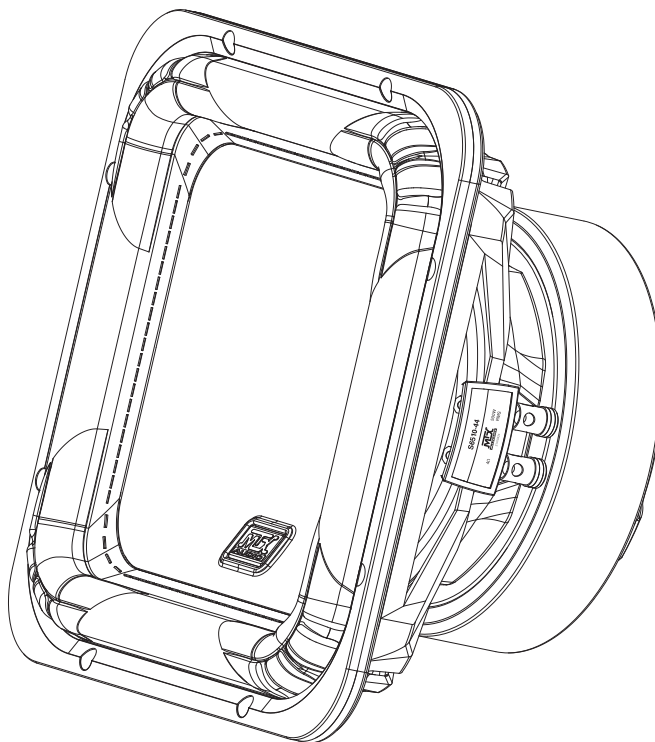

Specifications

Las especificaciones, Specifications, Spezifikationen

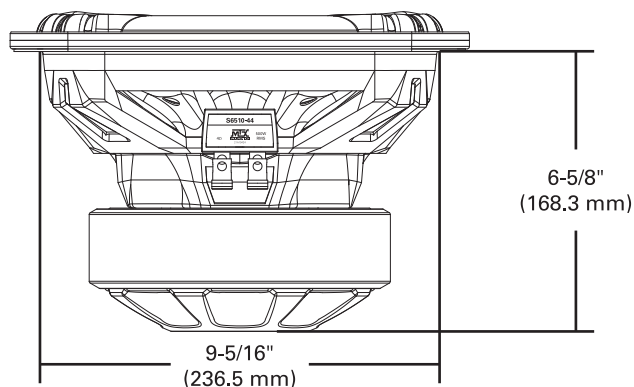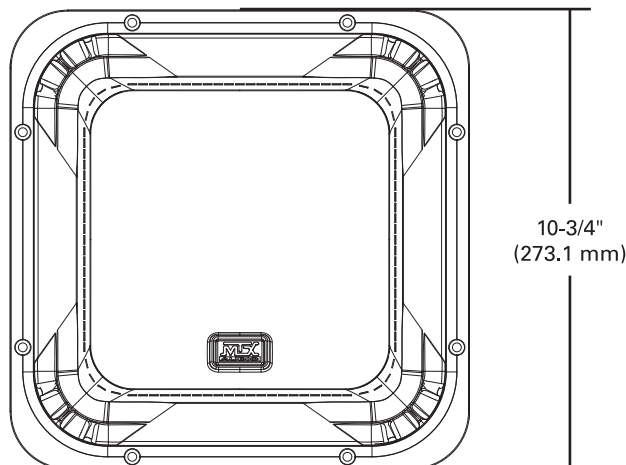

Recommended Power Rating of 250 - 500 Watts RMS



La Potencia nominal recomendada, Le Pouvoir recommandé Evaluant, Empfohlene Kraft Einzuschätze

S6510-44 Recommended Enclosures

For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX. For additional enclosure designs check the MTX website.

Sealed Enclosure



El Cerco sellado, Cloture scellée, Abgedichtete Einschließung

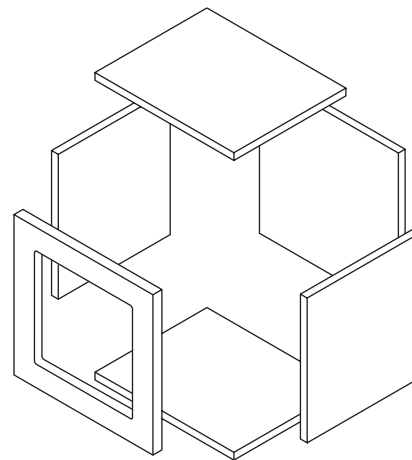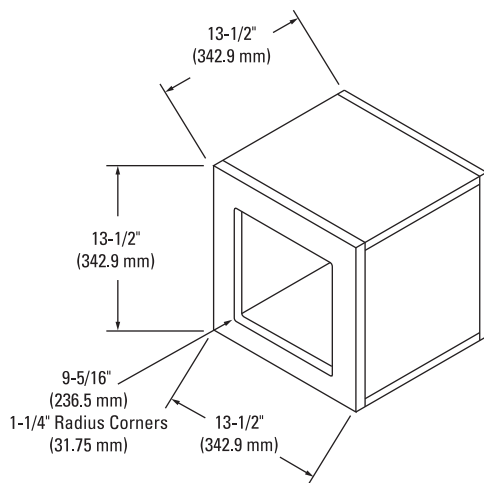

Net Internal Volume: 1.00 ft³

Vented Enclosure

Descargar Cerco, Clôture donnere vent, Vented Einschließung

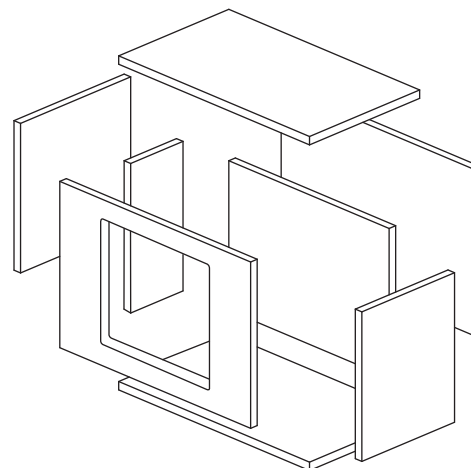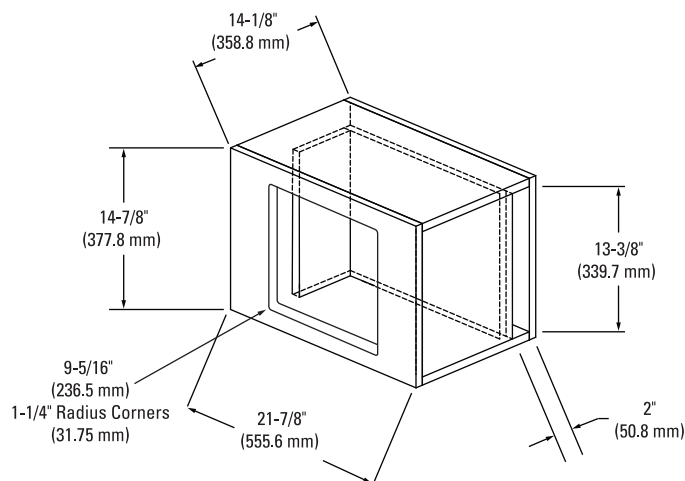

Net Internal Volume: 2.00 ft³
Port Length: 24"