

CODICE/CODE: **ZLS120160**

Batteria sigillata AGM DEEP-CYCLE (uso ciclico) al silicone
Silicon DEEP-CYCLE AGM maintenance free battery




Volt		12V
Capacity/capacità 25°C	20h (10.5Volt)	60Ah
	10h (10.5Volt)	54Ah
	5h (10.5Volt)	30.6Ah
Internal Resistance	Full Charged Battery 25°C	≤7m Ω
Capacity affected by Temperature/Effetti della temperatura sulla capacità	40°C	102%
	25°C	100%
	0°C	85%
	-10°C	75%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge cycle/ Ciclo di carica	IU + h	"In" max. 12Amp; "V1" 2.43V/cell
	IUIa	"In" max. 12Amp; "V1" 14.4Volt; "If" 0.5Amp.


Battery Dimensions/ Dimensioni batteria	L/L	265mm
	W/P	166mm
	H/A	188mm
	Tot- H/A	188mm
Weight/peso		20.7Kg
Terminal/terminal		AP
Plt. Qt. / Qt. per pallet		48
Case/contenitore		ABS


Amp. (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.75V			87	55.9	41.3	34.1	18.1	13.6	9.52	6.53	5.4	3.0

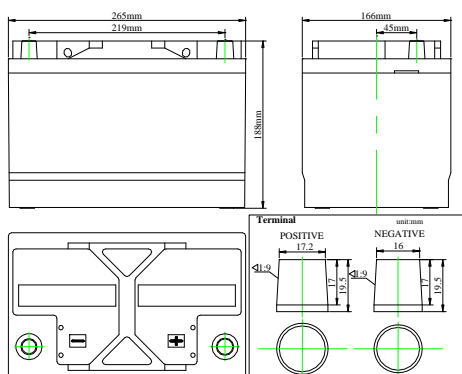


Temperature effect on capacity

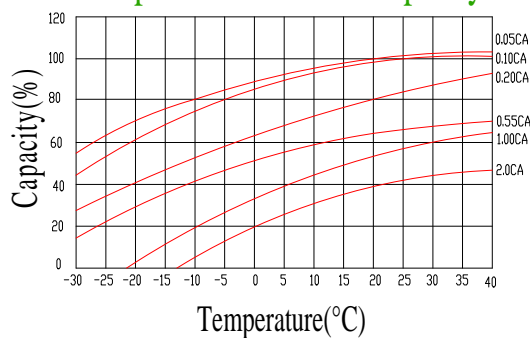

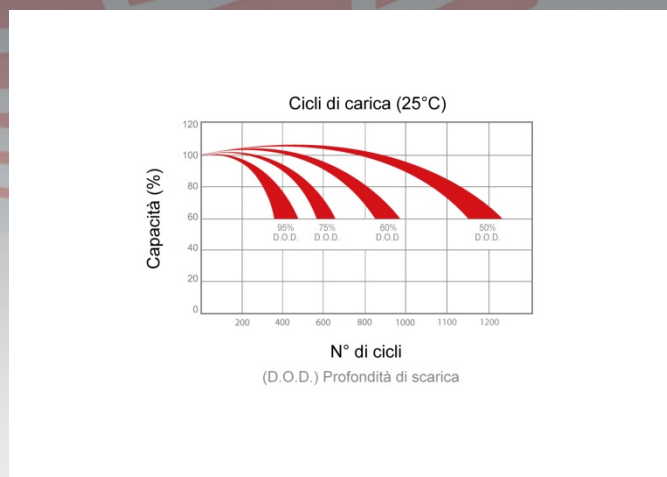

Charge cycle for sealed batteries (GEL/AGM): IU + holding

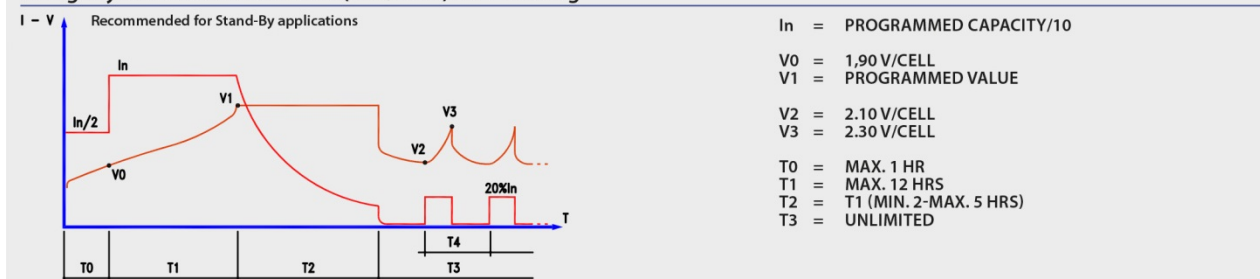

“IUla” charge cycle is always recommended in case of more than 2 batteries in series
 Ciclo di carica “IUla” è sempre necessario qualora ci siano più di 2 batterie collegate in serie

