


## HERITAGE.MODEL.THREE

### SPECIFICATIONS


POWER SUPPLY	9-15VCC
STANDBY CURRENT	<1.2A
INPUT SENSIVITY	0.4-8V
INPUT IMPEDANCE	48KΩ
OUTPUT 4Ω @ 12V	170WX2
OUTPUT MONO 4Ω @ 12/14.4V	600/690WX1
FREQUENCY RESPONSE	7HZ-70.000HZ
SIGNAL/NOISE RATIO	>100DB
DIMENSIONS (WXHXD)	434X40X187MM
WEIGHT	3.8KG

OPTIONS:  
 BUILT IN ACTIVE CROSS - OVER MODULE  
 CONTINUOUSLY ADJUSTABLE FROM 40 HZ TO 200 HZ  
 LOW PASS 24 DB X OCTAVE MONO

### STEREO CONNECTION

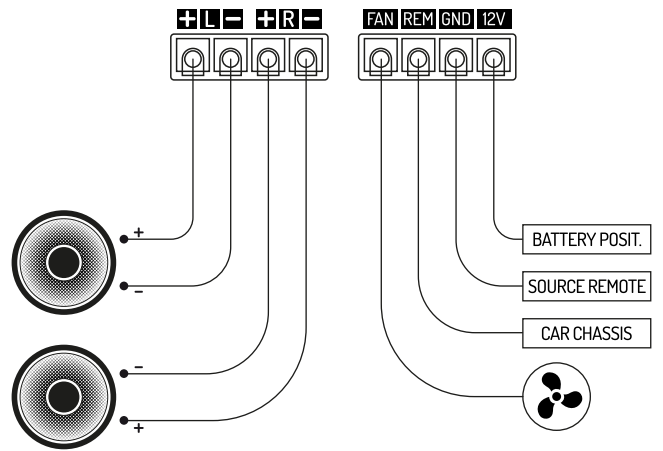

### MONO CONNECTION

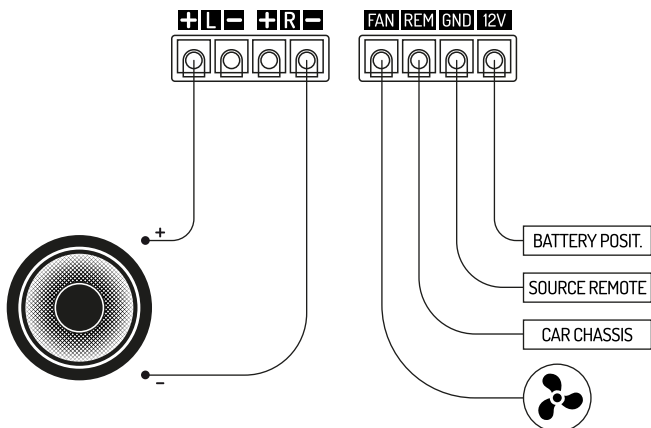

### STEREO + MONO CONNECTION

