

VeX™ Pods - Enclosed Speaker Systems

Thank you for choosing JL Audio VeX™ Enclosed Speaker Systems. With proper installation, your new speaker will deliver years of listening pleasure.

We strongly recommend that you have your Enclosed Speaker Systems installed by your authorized JL Audio dealer. The installation professionals employed by your dealer have the necessary tools and experience to properly install this product. If you prefer to perform your own installation, please read this and the instructions included with your Mounting Fixtures (Sold Separately) completely before beginning the process.

For Standard Models:

Wire Size	Wire Label	Use
16 AWG	"+"	Speaker Positive (+)
	N/A	Speaker Negative (-)

For Premium Models:

Wire Size	Wire Color	Use
16 AWG	Red/Stripe	Speaker Positive (+)
	Black/Stripe	Speaker Negative (-)
20 AWG	Red	Not Used
	Green	Not Used
	Blue	LED Positive (+)
	Yellow	LED Negative (-)


Note: Not all wires may be used in normal applications



WARNING!

Installation of this product requires use of JL Audio® Mounting Clamps/Brackets (sold separately). No other method of installation should be attempted.

To avoid injury, installation instructions included with the JL Audio® Mounting Clamps/Brackets **MUST** be followed precisely.

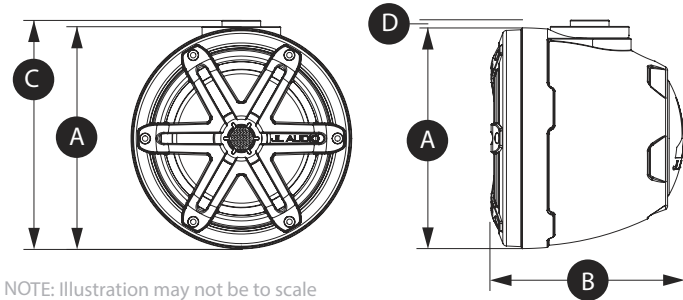

NOTE: Illustration may not be to scale

Physical Specifications	PS650-VeX-SG
Enclosure Diameter (A)	7.02 in / 179 mm
Enclosure Depth (B)	6.12 in / 156 mm
Height including Mounting Clamp Receiver* (C)	7.27 in / 185 mm
Mounting Clamp Receiver / Enclosure Offset (D)	0.20 in / 5 mm

*Mounting Clamps Required (Sold Separately)

General Specifications	PS650-VeX-SG
System Nominal Impedance	4 Ω
System Frequency Response	100 Hz - 25 KHz ± 3 dB
System Efficiency	89,5 dB @ 1 W / 1 m
Continuous Power Handling (RMS)	60 W
Peak Music Power	225 W
Recommended RMS Amplifier Power (per Ch.)	20 - 125 W

JL Audio® and the JL Audio logo are registered trademarks of JL Audio, Inc. "Ahead of the Curve" and its respective logo is a trademark of JL Audio, Inc. ©2017 JL Audio, Inc. For more detailed information please visit us online at www.jlaudio.com. Due to our policy of continuous product development, all specifications are subject to change without notice.

