

Signature

Guy Bonneville

BLAM

DRIVEN BY PASSION

TS 25 MG 57

Ultra high-end pure magnesium tweeter

- 100% pur magnésium 25mm (1") dôme tweeter
- High precision Machined Aluminium horn


Made in France




TECHNICAL SPECIFICATIONS

Component	Tweeter	
Max power	100 W	
Nominal power	15 W	
Impedance	6 Ω	
Freq. Response	2,5 KHz - 25 KHz	
Sensitivity (2,83V/1m)	90 dB	
Magnet	Neodymium	
Magnet size $\varnothing$ x h	24,5 x 3 mm	0,965"x 0,118"
Total driver displacement	-	
Weight of one component	0,112 kg	0,247 lb
Voice coil $\varnothing$	25 mm	0,984"
Voice coil height	2 mm	0,079"
Cone	Magnesium	

Unit : mm

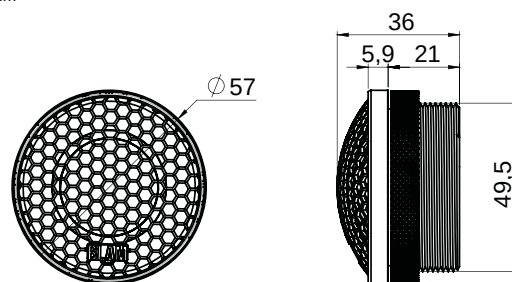

FREQUENCY RESPONSE / IMPEDANCE

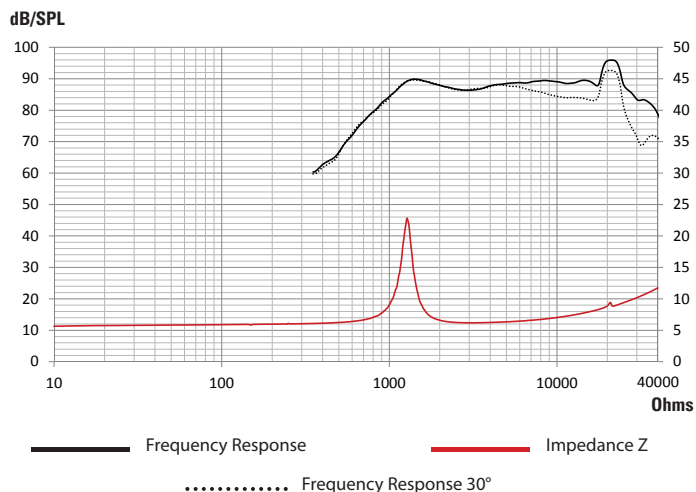

THIELE-SMALL PARAMETERS

effective $\varnothing$ (d)	28 mm
Sd	6,16 cm ²
Xmax	-
Re	6 Ω
Fs	1255 Hz
Le	-
L2	-
Vas	-
Mms	-
Cms	-
BL	-
Qts	-
Qes	-
Qms	-
Sensitivity (dB/W/m)	88,8 dB

contact@blam-audio.fr
www.facebook.com/blamaudio

www.blam-audio.fr