
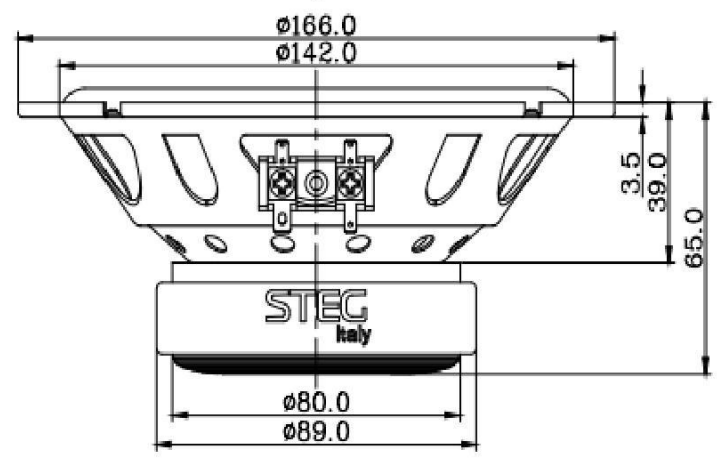
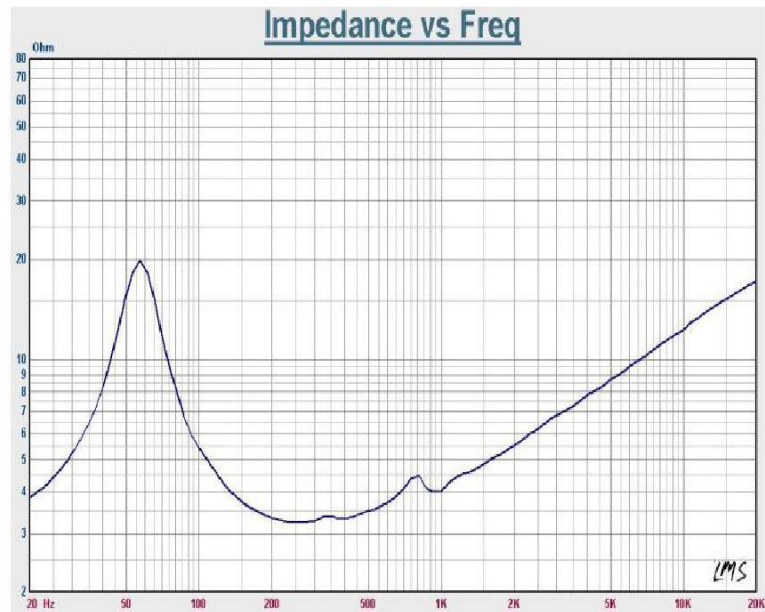


Speaker Model: **SQ 650C- WF**

IAPHRAGM	MTL:	Rubber+Paper
NOMINAL IMPEDANCE:	4.0±15% Ω	
DCR IMPEDANCE:	3.6±10% Ω	
SENSITIVITY 1W/1M:	87.0±3 dB	
FREQUENCY RESPONSE:	60-10K Hz	
FREE AIR RESONANCE:	60±20% Hz	
VOICE COIL DIAMETER:	25.5 mm	
RATED POWER INPUT:	180 W	
MAXIMUM POWER INPUT:	220 W	
MAGNET WEIGHT(OZ):	Ferrite	
FERRO FLUID ENHANCED:	NO	
	Qms:	4.09
	Qes:	0.65
	Qts:	0.56
	BL:	4.5TM

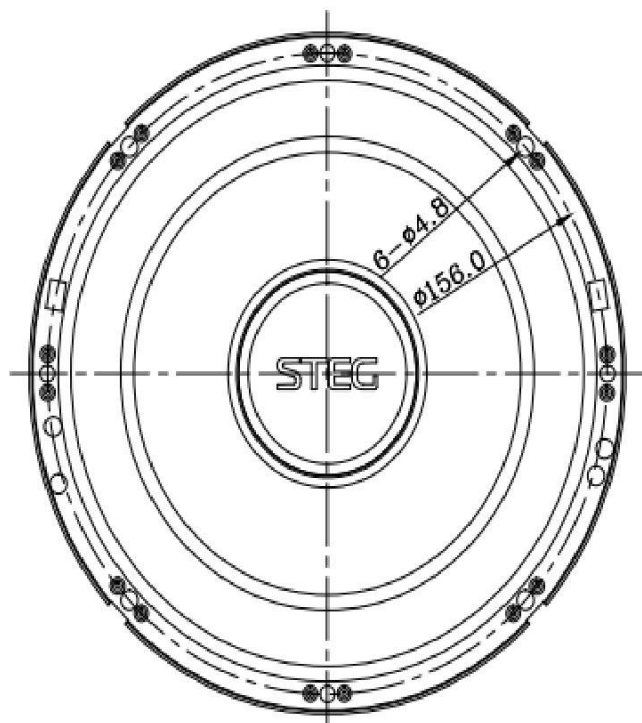

Speaker Model: **SQ 650C-TW**

IAPHRAGM	MTL:	Silk+AL
NOMINAL	IMPEDANCE:	4.0±15% Ω
DCR	IMPEDANCE:	3.6±10% Ω
SENSITIVITY	1W/1M:	89.0±3 dB
FREQUENCY	RESPONSE:	1800-20K Hz
FREE AIR	RESONANCE:	1800±20% Hz
VOICE COIL DIAMETER:	25.4	mm
RATED POWER	INPUT:	15 W
MAXIMUM POWER INPUT:	30	W
MAGNET	WEIGHT(OZ):	NEO

FERRO FLUID ENHANCED: YES

