

FIAT DUCATO

2015 ->

Compatible with double DIN devices




Double DIN Kit contents


Facia Plate

Mounting Brackets + Screws

Installation Manual Double DIN Kit

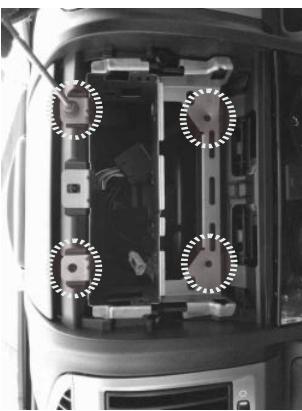

Remove the original plastic and the original car unit. Unscrew the four screws circled in the figure and remove the metallic grid.

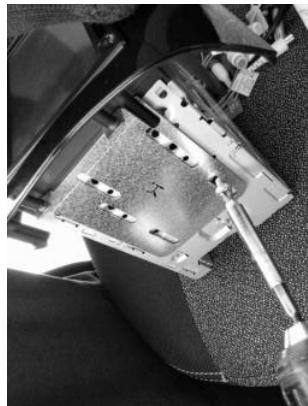

Take the AFT unit and fix it to the assembly with screws. Adjust the distance during the fixing in order to reach the right ledge of the unit.



Cut and remove the plastic parts along the dotted white line in the figure.



Connect all cables, verify the proper functioning of the system and insert the radio-frame into the housing. This is the final result.



Put the mounting brackets on the new facia plate provided and fix them with screws. Pay attention to the letters on the brackets.