

Steering wheel control interface installation kit for:


SSANGYONG

Model: Rexton only for vehicles with dual camera

Year: 2016>

Kit content: SWC Resistive interface
wiring harness
camera adapter
voltage stabilizer
radio adapter(*) if included


Customer code:

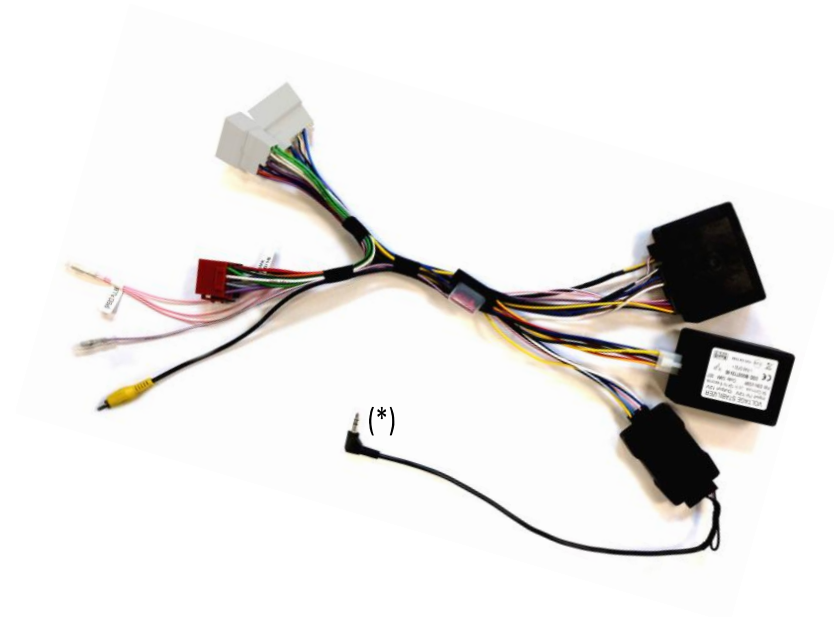

INSTALLATION MANUAL

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.
10/2016 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.RO

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.
10/2016 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

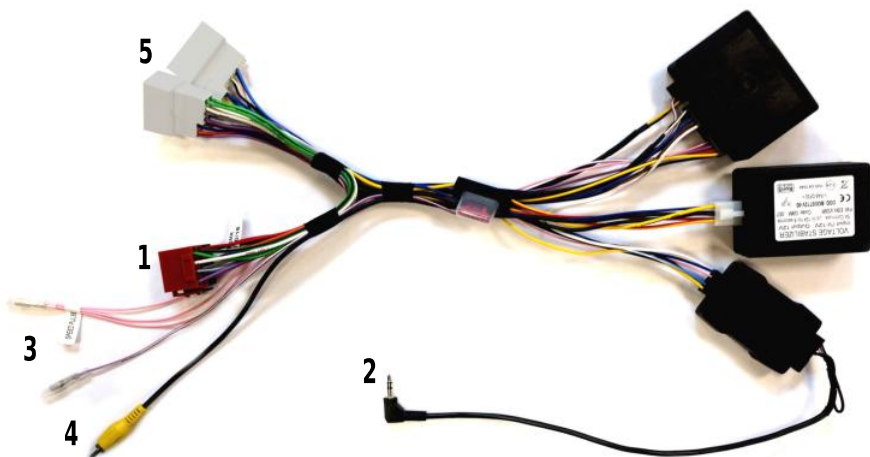

ATTENTION!


In order to prevent ESD damage, the WHEEL REMOTE JACK must be connected before plugging in the connectors on car side.

Connect cables to the radio side as follow:

- 1- to ISO CONNECTORS (black and red housings)
- 2- to WIRED REMOTE SOCKET (NOTE: do not connect to microphone socket)
- 3- to SERVICES (if required); function is marked on the wire:
 - Pink - Speed
 - Violet/White - Reverse
- 4- to CAMERA CONNECTOR

Connect cables to the car side as follow:

- 5- to CAR CONNECTOR

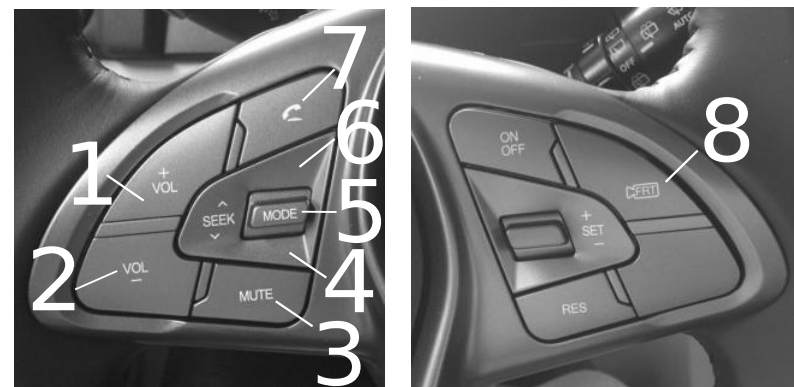

The steering wheel buttons perform the following functions (if supported by the radio):

- 1- Volume +
- 2- Volume -
- 3- Short Press (<0,5 Secs) = Mute
Long Press (>0,5 Secs) = Reject incoming call *
- 4- Seek down
- 5- Source
- 6- Seek up
- 7- Short Press (<0,5 Secs) = Accept incoming call
Long Press (>0,5 Secs) = Voice *
- 8- Front camera **

* NOTE: depending on the radio model, the activation time of this function could take up to 3 seconds.

** NOTE: due to safety reasons, the front camera is available only at low speed.

cut along the dotted line - copy for the vehicle owner