


LIVE

LSP 68

6 INPUT TO 8 OUTPUT HIGH PERFORMANCE DIGITAL SOUND PROCESSOR




KEY STRENGTHS


- High resolution DSP with optical inputs
- Recall of stored presets and main setting management through the remote control
- BT 5.0 streaming



Download for Windows - **BLAM LSP 68**

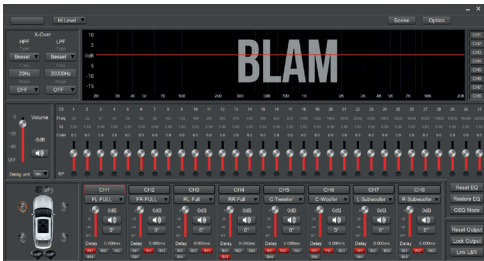


Smartphone App - **LSP 68**

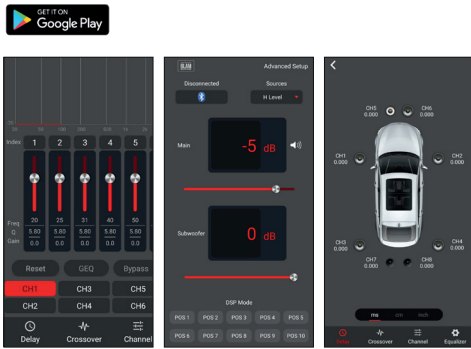

TECHNICAL FEATURE

- 64-bit Digital signal processor
- Sampling frequency 96 kHz
- 4 high level input
- 6 low level input
- 1 optical input
- 1 digital signal input
- BT 5.0 antenna
- 8 output
- Signal / noise ratio > 100 dB
- Variable equalizer: 31 bands (CH 1-6) and 11 bands (CH 7-8)
- Selectable slope 6-48 dB, Butterworth, Linkwitz or Bessel alignment
- Up to 15 ms time delay available on each channel
- Dimensions (L x W x H): 197 mm x 129 mm x 32 mm - 7.8" x 5.1" x 1.3"
- Weight: 786 Kg
- Remote control is included

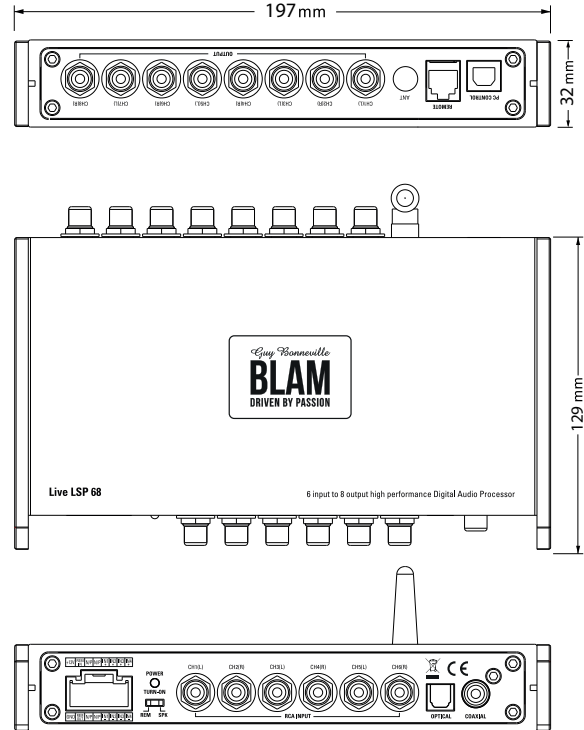

contact@blam-audio.fr
www.facebook.com/blamaudio
www.blam-audio.com