



- Easy Underseat Installation
- Power: 260 W (Max), 130 W (RMS)
- Amplifier Class: AB
- Low Level RCA and High-Level Inputs
- Variable Gain Control
- Low Pass Filter
- Variable Bass Boost
- Phase Control
- Auto Power-ON (with Hi-Lev Inputs)
- Remote Control

S/N Ratio	91dB
THD	0.05%
Sensitivity (1W)	92dB
Frequency Response	10Hz - 150Hz
Output Impedance	2 Ohm
Voltage	14.4V (10V - 16V)
Fuse Rating	15A
Audio In Sensitivity	RCA Input: 150mV Speaker Input: 1.5V
Input Gain	6V - 0.15V
Low-Pass Filter	50Hz - 150Hz
Bass Boost	0 - 12dB
Phase Switch	0 - 180°
Magnet Type	Ferrite
Enclosure Housing	Aluminum
Harness	DC Cord, Hi-Level and Low Level Input Speaker, Input Plug
Remote Control	Wired

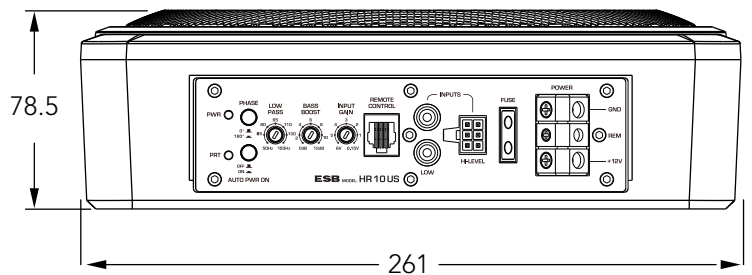

Control Panel

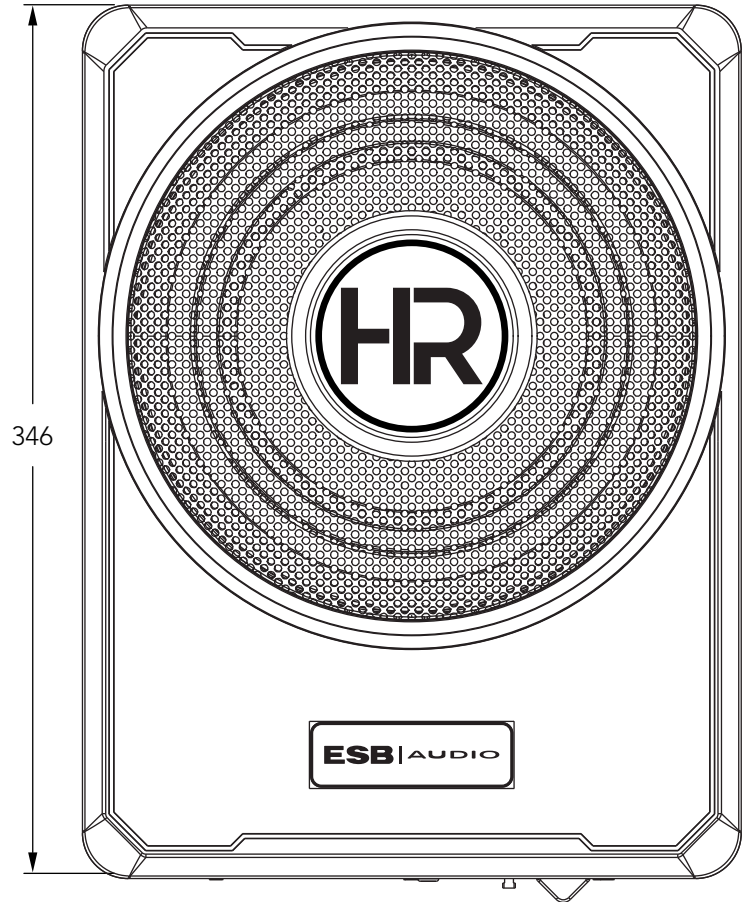