

Lavoce

NEODYMIUM MAGNET
ALUMINIUM BASKET DRIVER

-




All the specifications subject to change without notice.

Thiele-Small parameters are measured after preconditioning: a) at 20°C–22°C, 50% humidity for 2 hours; b) by Klippel LSI measurement.

DC Resistance (Re)	11.7 ohm
Diaphragm Area (Sd)	531 cm² (82.305 in²)

Resonance Frequency (Fs)	49 Hz
Moving Mass (Mms)	62.5 g (2.205 oz)
Compliance (Cms)	0.168 mm/N
Force Factor (BxL)	25.02 N/A
Mechanical Q-Factor (Qms)	3.26
Electrical Q-Factor (Qes)	0.36
Total Q-Factor (Qts)	0.32
Equivalent Air Volume (Vas)	67.04 l (2.367 ft³)
Voice Coil Inductance (Le)	1.27 mH
Reference Efficiency (Eta 0)	2.12 %
Efficiency Bandwidth Product (EBP)	136 Hz

DIMENSIONS

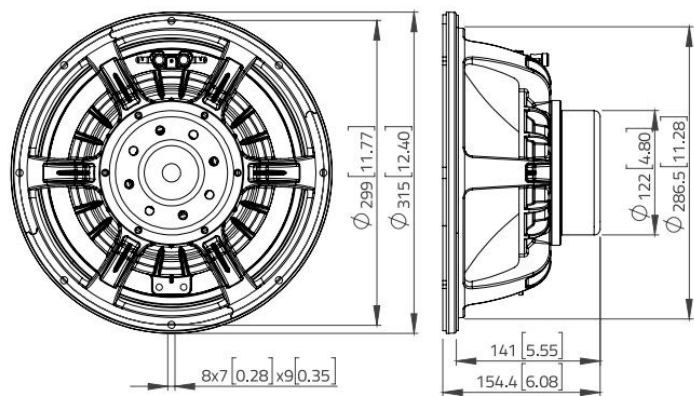

SHIPPING INFORMATION

Net Weight	5.2 kg (11.464 lb)
Multipack Quantity	1
Multipack size W x D x H	360 mm x 360 mm x 195 mm (14.2 in x 14.2 in x 7.7 in)
Multipack Weight	6.5 kg (14.33 lb)

