

HI ENERGY

## HO 500

180 watt




midrange

### Technical Specifications

Component	Midrange	
Size	mm	38 (1 1/2")
Power Handling (Watt)	peak continuous program	180 180W@700Hz 12dB Oct
Impedance	Ohm	4
Frequency response	Hz	500-10k
Sensitivity	dB/SPL	92
Outer diameter	mm	75
Mounting hole diameter	mm	67
Magnet size	mm	57
Total depth	mm	45
Mounting depth	mm	31
Weight of one component	kg	0,290
Voice coil diameter	mm	38



1. Cotton soft dome midrange.
2. 38mm ø, ferrofluid-cooled mobile voice coil.
3. High energy neodymium magnet.
4. Rear acoustic chamber.

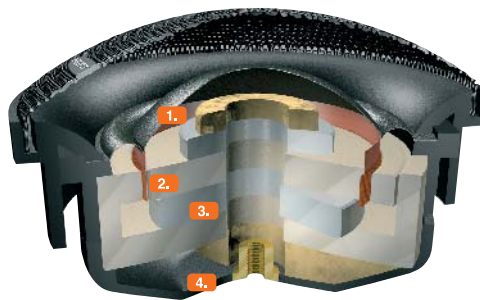

### Electro-Acoustic Parameters

D	mm	38
Xmax	mm	-
Re	ohm	4,2
Fs	Hz	530
Le	mH@1kHz	0,89
Le	mH@10kHz	0,16
Vas	lit	-
Mms	gr	-
Cms	mm/N	-
BL	T-m	-
Qts		0,35
Qes		0,69
Qms		0,73
Spl (1m/2,83V)	dB	92

