Maximum 8.

M8IB5 Marine Subwoofer Driver

JL Audio's maximum-performance marine subwoofers deliver the kind of bass that has made JL Audio famous in the automotive and home theater sound arenas. This is bass that will impress you--not only with its sheer level, but even more with its smoothness, balance and precision.

The M8IB5 8-inch Marine Subwoofer Driver is optimized for high-power, infinite-baffle operation so that it can be installed in a variety of locations, without the need for a dedicated enclosure. It is available in four great looks to match any boat's styling.

To deliver high output and quality sound at the same time, the M8IB5 employs a specialized motor and suspension design that precisely controls a very long excursion envelope, over 0.5 inches one-way, linear! No other marine subwoofer of its size even comes close to this performance capability; the M8IB5 simply leaves all of them in its wake.

Used in combination with our marine coaxials or component systems, the M8IB5 will allow you to create the ultimate sonic foundation for your marine audio system, making all your music sound more exciting.

M8IB5 Features:	M8IB5 Specifications:
Truly engineered for marine duty Exceeds marine industry standards for saltwater, salt fog and ultraviolet exposure.	**Nominal Diameter:** 8 in / 200 mm
	Overall Diameter (A): 8.80 in / 224 mm
Legendary JL Audio subwoofer performance Long-excursion, ultra-linear motor and suspension designs deliver bass that will impress you, not only with its sheer level, but even more with its smoothness, balance and precision.	**Bolt Hole Circle (B):** 7.97 in / 202 mm
	Motor Overmold Outer Diameter (C): 5.50 in / 140 mm
High power handling Designed to benefit from operation with quality amplification, such as the JL Audio marine amplifiers.	**Frontal Grille Protrusion (D)*:** 1.45 in / 37 mm
	Mounting Hole Diameter (E): 7.375 in / 187 mm
Four great looks to choose from! Two different grille styles (sport or classic), each available in all-white or a titanium / black color scheme.	**Mounting Depth (F):** 5.18 in / 132 mm
	Net Weight: 6.82 lbs. / 3.094 Kg
	Driver Displacement: 0.032 ft^3 / 0.91 litres
	One-way, Linear Excursion (Xmax):** 0.53 in / 13.5 mm
	Nominal Impedance: 4 ohm
	Power Handling (continuous): 200 W

*** Frontal grille protrusion measured from mounting surface.**
**** Xmax specifications are derived via one-way voice coil overhang method with no correction factors applied.**

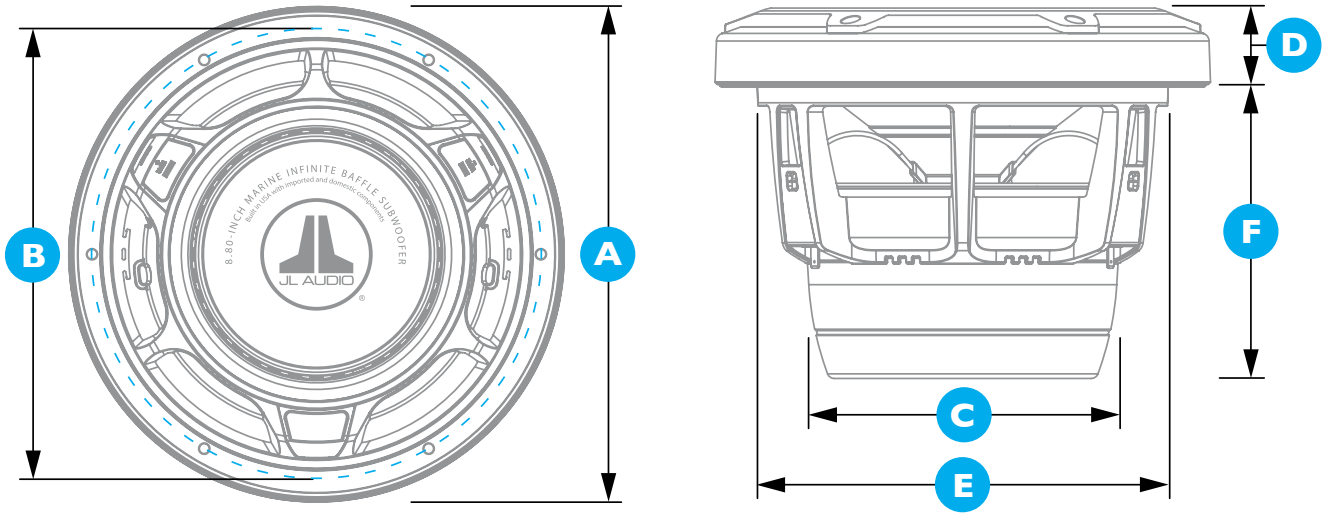

©2014 JL Audio, Inc. • "JL Audio", "Ahead of the Curve" and the JL Audio logo are registered trademarks of JL Audio, Inc.
Due to our policy of continuous product development, all specifications are subject to change without notice.

w w w . j l a u d i o . c o m
10369 North Commerce Parkway • Miramar, Florida • 33025 • USA

SKU#97208 12-2013
Printed in U.S.A.