

# LIVE

Guy Bonnevillie

# BLAM

DRIVEN BY PASSION


## LA 808 DSP PRO

75 W x 4 CHANNEL AND 4 RCA OUTPUT CLASS D INTEGRATED DSP AMPLIFIER


### KEY STRENGTHS

- Ultra compact
- Sound quality
- 10 Band EQ
- Smartphone Apps
- Streaming using BBT dongle (optional)

Download for Windows - [BLAM LA 808 DSP PRO](#)

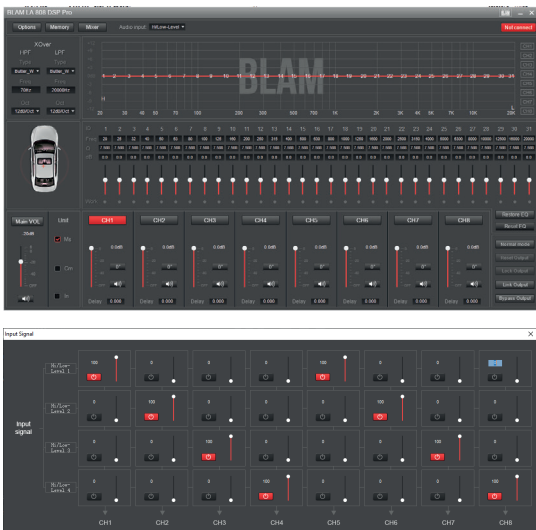

Smartphone App - [LA 808 DSP PRO](#)

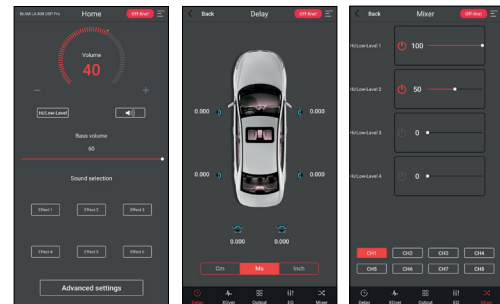

### TECHNICAL FEATURE

High level inputs with auto turn on

4 high level inputs and 4 low levels inputs

4 amplified outputs and 4 low level outputs

RCA low level inputs: 0.8 V / 8 V

RMS Power (4  $\Omega$ ): 4 x 50 Watts RMS

RMS Power (2  $\Omega$ ): 4 x 75 Watts RMS

RMS Bridged Power (4  $\Omega$ ): 2 x 150 Watts RMS

Frequency response 20 Hz - 20 kHz

Signal / noise ratio > 100 dB

Protections: short circuit / low impedance / reversal of polarity / heat protection

External remote control to adjust the volume and switch the mode

Selectable slope 6 - 48 dB, Butterworth, Linkwitz or Bessel alignment


Up to 10 ms time delay available on each channel

Dimensions (L x W x H): 216 mm x 149 mm x 47 mm - 8.5" x 5.9" x 1.9"

Weight: 1,377 Kg

BT dongle optional

Remote control is included

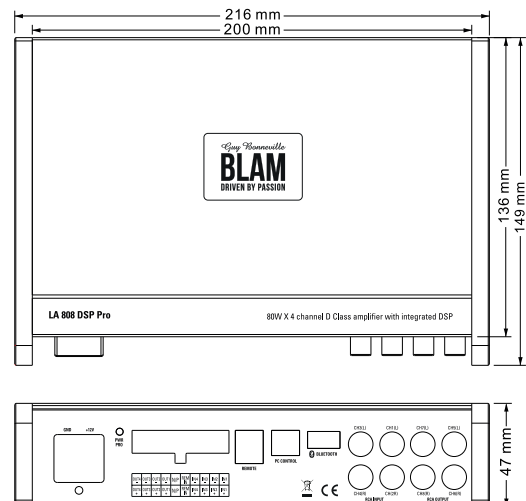

[contact@blam-audio.fr](mailto:contact@blam-audio.fr)  
[www.facebook.com/blamaudio](https://www.facebook.com/blamaudio)  
[www.blam-audio.com](https://www.blam-audio.com)