


# CA-SVW-UAR.001AE Installation Manual



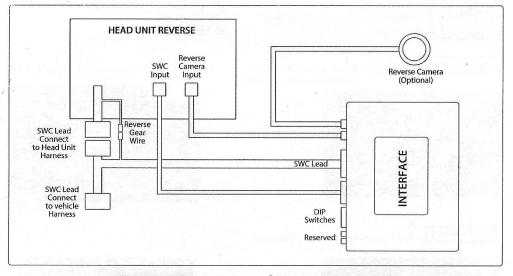

- Reverse camera Input from Head unit, & reverse camera connection from vehicle (optional).
- 2 Main power harness, connecting to the vehicle harness and head unit (Please ensure that the Reverse lead is connected)
- 3 Steering wheel control input.
- 4 Dip Switch settings Down = ON, Up = OFF
  - 1, Always ON.
  - 2, Setting for Reverse camera ON = PAL, OFF = NTSC.
  - 3, Resets the Display settings back to Factory default. Selecting the dip switch Position to on, the menu background display will turn red indicating that factory default mode is enabled, please note no adjustment is possible whilst factory default mode is switched on.
  - 4, Not applicable.
- 5 Not Applicable.

### **INSTALLATION INSTRUCTIONS**

## Menu User Guide




To Select the Menu, press and hold the speech button for 2 seconds, this will enable the menu. To select the option press the speech button once.



To navigate through the menu potions use the Track Up / Track down buttons.

#### screen size and position

Adjust screen size & position, so all 4 corner markers are touching the corners of the aftermarket head unit display.





#### Picture setting

Adjust Brightness/ Contrast/ Saturation





#### Vehicle setting set the driver position.

Vehicl	e Sett	ings	
Driver Position Amplifier Settings			Left
← Back			
	7		

Vehicle Settings	
<mark>Driver Position</mark> Amplifier Settings	Right
← Back	

Amplifier Se	ettings
Volume	2
Balance	
Fader	
Bass	
Mid	
Treble	
On Delay	
← Back	

Amplifier Setting ( If Amplifier is fitted in vehicle ) Adjust the gain of the aftermarket head unit volume to match the Amplifier volume.


## Menu User Guide


Preferences

Selecting the Park assist screen.









**Preferences** (Optional) Reverse camera connected, If reverse camera is connected, select the camera option in Reverse Priority.

Note: User can toggle between the Rear View camera display and OPS display by pressing and holding the Speech button, whilst the vehicle is in reverse gear.

Preference	es
Park Assist Version Camera Connected <b>Reverse Priority</b> Park Brake Source Restore Factory Settings ← Back	0 Yes <b>Camera</b> Always On

0
Yes
Park Assist
Always On

Preferences	
Park Assist Version Camera Connected Reverse Priority Park Brake Source Restore Factory Settings ← Back	0 Yes Park Assist <b>Speed</b>

Preference	s
Park Assist Version Camera Connected Reverse Priority Park Brake Source Restore Factory Settings — Back	0 Yes   <b>Park Assist</b>   Always On

Preference	5
Park Assist Version Lamera Connected Reverse Priority Park Brake Source Restore Factory Settings ( Back	0 Yes Park Assist Brake

### Setting Park Brake Source

rake - Park output will be active when park brake on.
- Park output will be active when speed less than 3KMH

Always on - Park output will always be active.

#### **Legal Information**

By Law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. This product should only be used while standing or to display fixed menus or rear-view-camera video when the vehicle is moving.